










RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

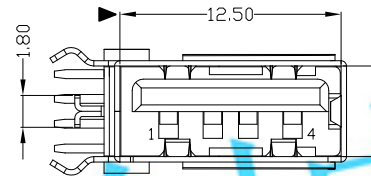

RECOMMENDED PCB LAYOUT

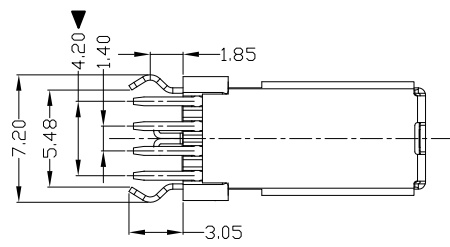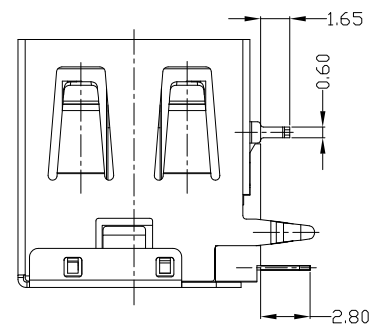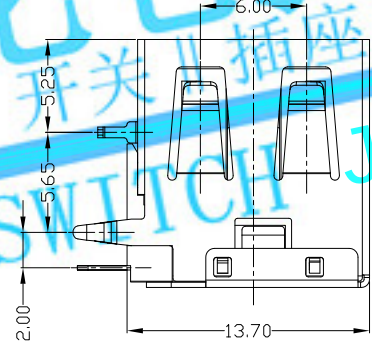

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000M Ω MIN;
- 3) CONTACT RESISTANCE: 30m Ω MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*C69

1: WHITE
2: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

4	BACK COVER	COPPER ALLOY	1	PLATED NICKEL
3	HOUSING	PBT	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

X. ± 0.35	X.' $\pm 2^{\circ}$	UNITS	mm
.X ± 0.3	.X' $\pm 1^{\circ}$	MAT'L	SEE NOTE
.XX ± 0.25	.XX'	FINISH	SEE NOTE
.XXX ± 0.15	.XXX'	Q'TY	SEE NOTE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

LONGCHUANG ZHONGYE (HK) CO., LIMITED

TITLE:
USB AF 90° DIP 侧插三只脚
无卷边无缺口
DR: gan 2014/6/18
CHKD: gan 2014/6/18
APPD:

PART NO.:
USAF-04*N-1*C69
DWG NO.:
AII-C69
SCALE: 1:1
SHEET: 1/1
REV: B
CUSTOMER: DRAWING