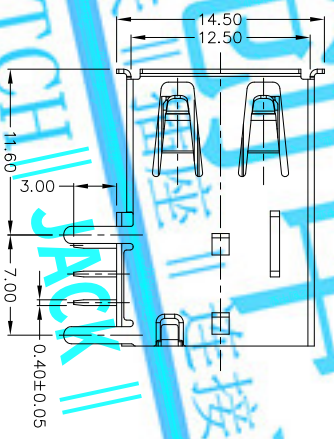

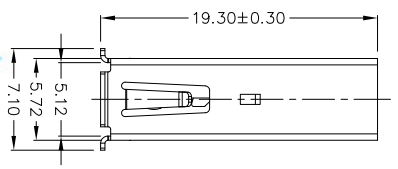


Bill of materials:

5	BACK COVER	SPCC	1	PLATED NICKEL	X: ±0.35	X: ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED	
4	BOTTOM COVER	PBT+30%GF	1	UL94V-0	X: ±0.30	.X' ±1°	MAT'L		
3	HOUSING	PBT+30%GF	1	UL94V-0	.XX ±0.25	.XX°	SEE NOTE		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX°	FINISH		
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	SEE NOTE				Q'TY
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE INNOTECH INC. (CONSIST OF ACCURATE INNOTECH INC.				
					TITLE: USB AF 90度 DIP 侧立式 长体直脚		PART NO.: USAF-04XN-1XC601		
					DR: Rocky 2018/11/19		DWG NO.: All-C601		
					CHKD: Rocky 2018/11/19		SCALE SHEET REV.		
					APPD:		1:1 1/1 B CUSTOMER DRAWING		

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩMIN;
 - 3) CONTACT RESISTANCE: 30mΩMAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1* C601

- 1: Au 1U"
- 6: Au 30U"
- W: WHITE
- B: BLACK
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP