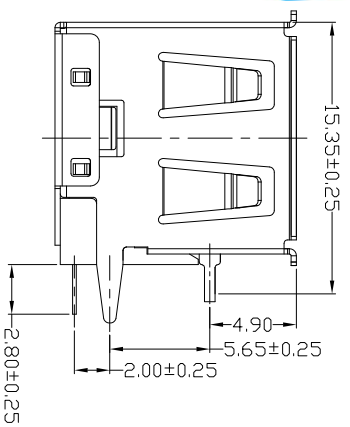

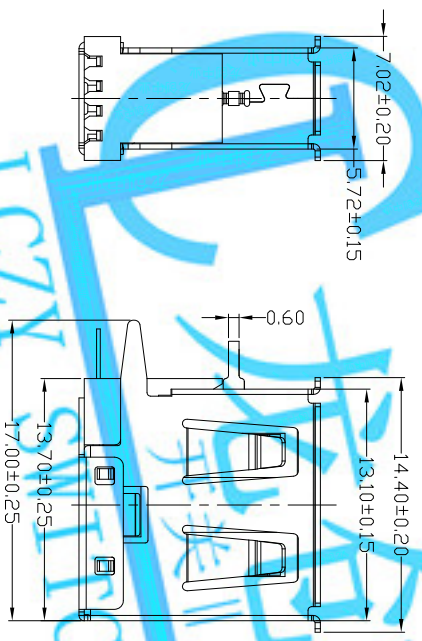
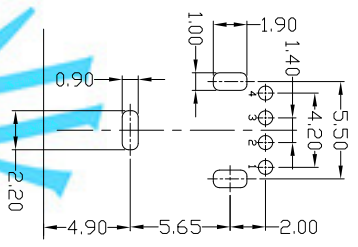
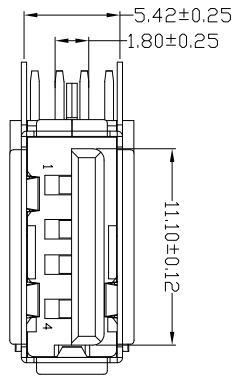


Bill of materials:

3	HOUSING	PBT+30%GF	1	UL 94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING:2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

- USAF-04***N**-1***CA01**
- 1:AU 1U" W/WHITE
 - 6:AU 30U" B:BLACK
 - 1:PBT
 - 2:PA6T
 - 3:PA9T
 - 4:CP

X. ±0.35	X. ±2'	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
X. ±0.3	X. ±1'	MAT'L	SEE NOTE				
.XX ±0.25	.XX'	FINISH	SEE NOTE				
.XXX ±0.15	.XXX'	Q'TY	APPD:				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INMATECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INMATECH INC.				DR: <i>Ricky</i> 2019/02/13	DWG NO.: USAF-04XN-1XCA01	SCALE 1:1	REV. B
				CHKD: <i>Ricky</i> 2019/02/13	AI1-CA01	SHEET 1/1	CUSTOMER DRAWING