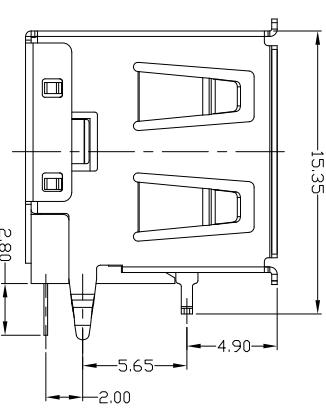

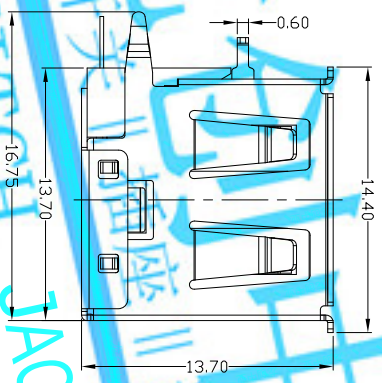



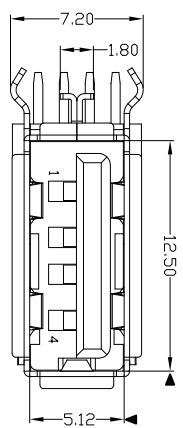


Bill of materials:

4	BACK COVER	COPPER ALLOY	1	PLATED NICKEL
3	HOUSING	PBT/LCP	1	UL 94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING:2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. DIMENSIONS MARKED “▼” TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*1N-1*CA2

1Au 1U*
6Au 30U*

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

X: ±0.35	X: ±2°	UNITS	mm
.X ±0.3	.X' ±1°	MATL	SEE NOTE
.XX ±0.25	.XX'	FINISH	SEE NOTE
.XXX ±0.15	.XXX'	Q'TY	APPD:
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INDUSTRIES INC.			

TITLE:

USB A/F 90° DIP侧插三只脚

TITLE:

USAF-04*1N-1*CA2

DR:

gan 2012/7/05

CHKD:

gan 2012/7/05

SCALE

1:1

SHEET

1/1

REV.

B

CUSTOMER

DRAWING

LONGCHUANG ZHONGYE (HK)CO.,LIMITED