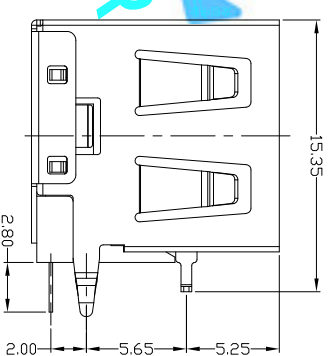

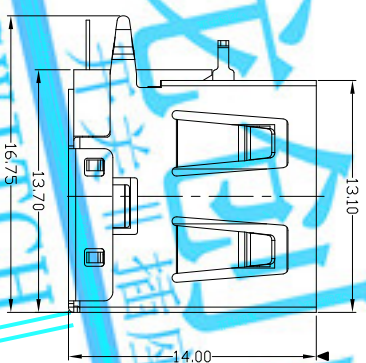



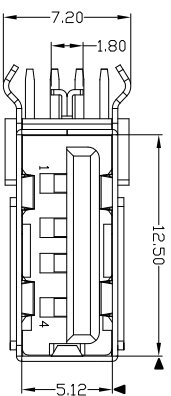


NOTES:
1. ELED

- ## 1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING:2AMP,30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C. & IPQC.

4. PART NO.

USAF-04*N-1*CA4

W:WHITE
—B:BLACK

1:AU 1U"—
6:AU 30U"

— 1:PBT
2:PA6T
3:PA9T
4:LCP

[illegible]