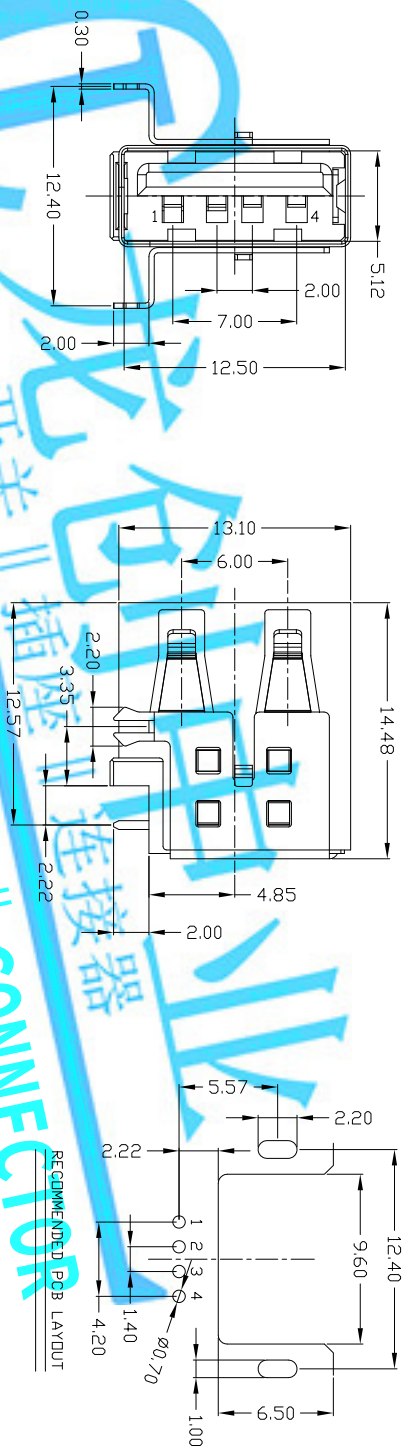


- NOTES:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
    - INSULATION RESISTANCE: 1000MΩMIN;
    - CONTACT RESISTANCE: 30mΩMAX;
    - WITHSTANDING VOLTAGE: 500V AC;
    - OPERATING TEMPERATURE: -55°C TO +85°C.
  - Mechanical:
    - Mating Force: 35N MAX
    - Unmating Force: 10N MIN.
  - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

USAF-04\* N-4BC37

1Au 10" 6Au 300"

W: WHITE  
B: BLACK  
1PBT  
2PA6T  
3PA9T  
4LCP

|                    |            |              |     |                                      |                                                                                                                                                          |                             |                           |
|--------------------|------------|--------------|-----|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|---------------------------|
| Bill of materials: |            |              |     | LONGCHUANG ZHONGYE (HK) CO., LIMITED |                                                                                                                                                          |                             |                           |
| 4                  | BACK COVER | SPCC         | 1   | PLATED NICKEL                        | X: ±0.35                                                                                                                                                 | X: ±2°                      | UNITS                     |
| 3                  | HOUSING    | LCP+30%GF    | 1   | UL94V-0                              | X: ±0.3                                                                                                                                                  | X: ±1°                      | MAT'L                     |
| 2                  | SHELL      | COPPER ALLOY | 1   | PLATED NICKEL                        | .XX ±0.25                                                                                                                                                | .XX                         | SEE NOTE                  |
| 1                  | TERMINAL   | COPPER ALLOY | 4   | PLATED GOLD/TIN                      | .XXX ±0.15                                                                                                                                               | .XXX                        | FINISH                    |
| ND                 | PARTS      | MATERIAL     | QTY | FINISHING                            | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC. |                             |                           |
|                    |            |              |     |                                      | QTY                                                                                                                                                      | SEE NOTE                    |                           |
|                    |            |              |     |                                      | APPD:                                                                                                                                                    | CHKD: <i>gym</i> 2014/07/08 | DWG NO.: USAF-04* N-4BC37 |
|                    |            |              |     |                                      | SCALE                                                                                                                                                    | SHEET 1/1                   | REV. B                    |
|                    |            |              |     |                                      | CUSTOMER DRAWING                                                                                                                                         |                             |                           |