

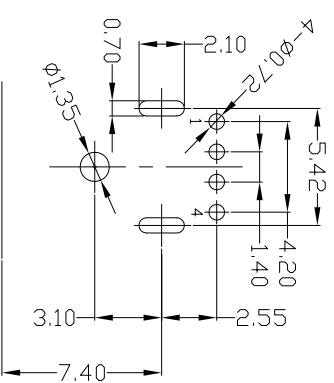
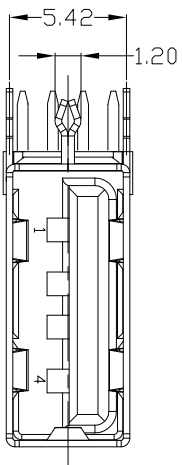
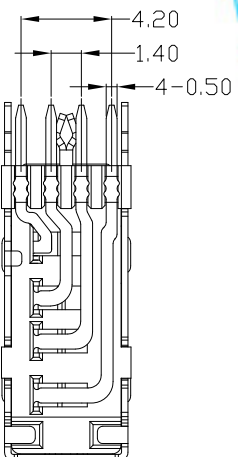
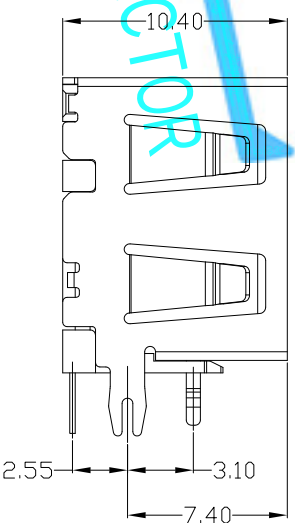





RECOMMEND PCB LAYOUT

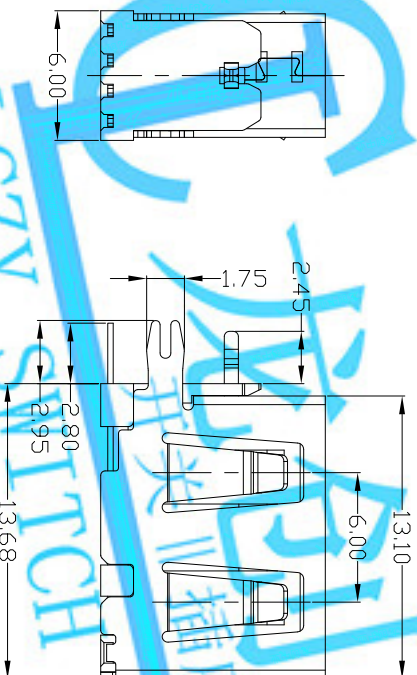

- NOTES:
1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2.0AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
 3. DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:				PART NO.:					
USB A/F 侧插短体10.5 平口				USAF-04XN-4XCA9					
DR: <i>yan</i> 2017/3/15				DWG NO.:					
CHKD: <i>yan</i> 2017/3/15				AII-CA9					
APPD:				SCALE		SHEET		REV.	
				1:1		1/1		B	
				CUSTOMER DRAWING					
UNITS		mm							
MAT'L									
SEE NOTE									
FINISH									
SEE NOTE									
Q'TY									
									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK) CO., LIMITED. NO REPRODUCTION OR USE IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.									
X. ±0.35		X. ±2*							
.X ±0.3		.X* ±1*							
.XX ±0.25		.XX*							
.XXX ±0.15		.XXX*							
PLATED TIN/NICKEL									
1									
COPPER ALLOY									
SHELL									
2									
COPPER ALLOY									
TERMINAL									
4									
PLATED GOLD/TIN									
QTY									
FINISHING									
MATERIAL									
PARTS									
ND									