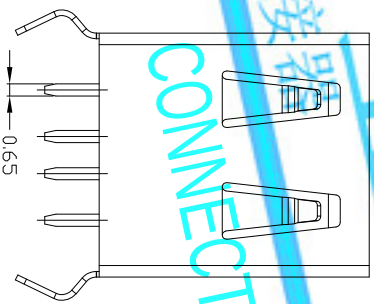
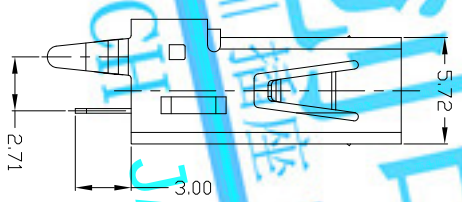
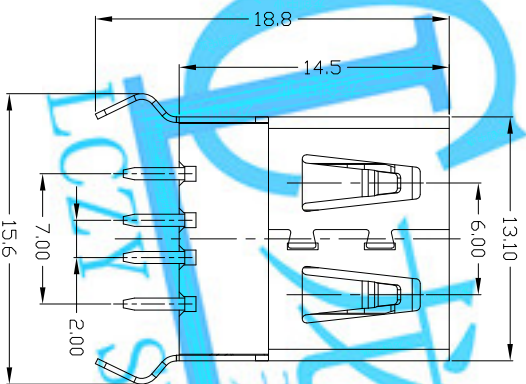




- NOTES:

1. ELECTRICAL:
1) VOLTAGE CURRENT RATING:2AMP,30V AC;
2) INSULATION RESISTANCE: 1000MΩ/MIN;
3) CONTACT RESISTANCE: 30mΩMAX;
4) WITHSTANDING VOLTAGE: 500V AC;
5) OPERATING TEMPERATURE:-55℃ TO +85℃.

2. Mechanical:
1) Mating Force: 35N MAX
2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
4. PART NO.

USAF-04*N-1*P601

14u 1U"▼
64u 30U"▼

W/WHITE
B/BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:				LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
4	COVER	PBT+30%GF	1	UL 94V-0	X: ±0.35	X: ±2	UNITS mm
3	HOUSING	PBT+30%GF	1	UL 94V-0	X: ±0.3	X: ±1	MAT'L
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ±0.25	.XX	SEE NDTE
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX	FINISH
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.		
					Q'TY	SEE NOTE	DR: 2016/9/20
					APPD: 2016/9/20	CHKD: 2016/9/20	DWG NO.: USAF-04*N-1*P601
					SCALE 1:1	SHEET 1/1	REV. B
					CUSTOMER DRAWING		