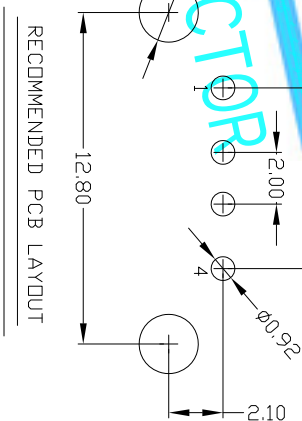
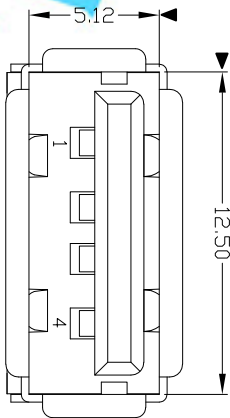
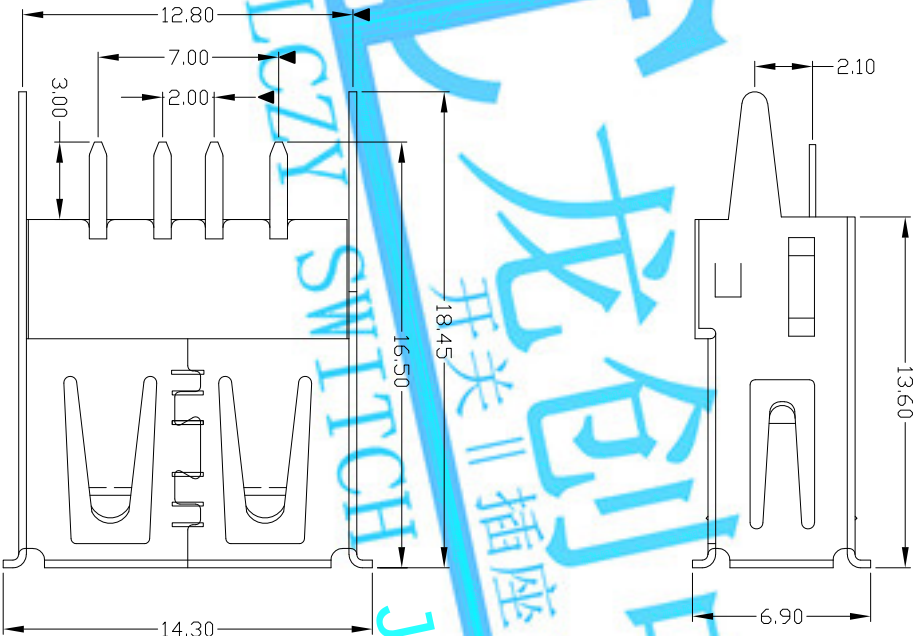


NOTES:

1. ELECTRICAL:

1) VOLTAGE CURRENT RATING:2AMP,30V AC;

2) INSULATION RESISTANCE: 1000MΩ MIN;

3) CONTACT RESISTANCE: 30mΩ MAX;

4) WITHSTANDING VOLTAGE: 500V AC;

5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

1) Mating Force: 35N MAX

2) Umating Force: 10N MIN.

3. NOTE:1.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

Bill of materials:

4	COVER	PBT+30%GF	1	UL 94V-0	X: ±0.35	X: ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
3	HOUSING	PBT+30%GF	1	UL 94V-0	.X ±0.3	.X' ±1°	MAT'L				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH				
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK) CO., LIMITED. ANY REPRODUCTION OR USE IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK) CO., LIMITED IS PROHIBITED.			SEE NOTE			
								Q'TY			
								APPD:			
								CHKD: <i>gan</i> 2012/7/03			
								DR: <i>gan</i> 2012/7/03			
								DWG NO.: A11-P84			
								SCALE	SHEET	REV.	CUSTOMER DRAWING
								1:1	1/1	B	