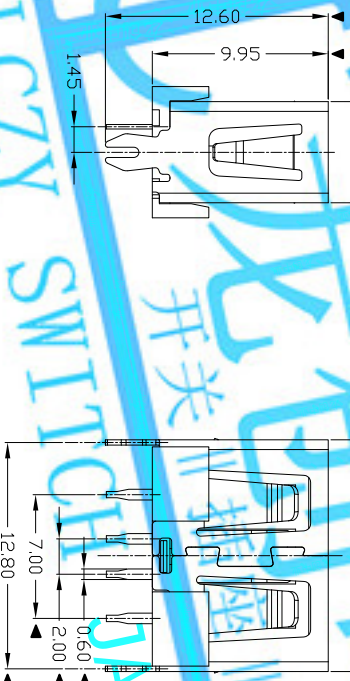



NOTES:

1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING:2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩMIN;
 - 3) CONTACT RESISTANCE: 30mΩMAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*P68

1:AU 1U*
6:AU 30U*
1:PBT
2:PA6T
3:PA9T
4:LCF

3	HOUSING	PBT/LCP+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

X. ± 0.35	X* $\pm 2^{\circ}$	UNITS
X. ± 0.3	X* $\pm 1^{\circ}$	mm
.XX ± 0.25	.XX*	MAT'L
.XXX ± 0.15	.XXX*	SEE NOTE
THESE DRAWINGS AND SPECIFICATIONS ARE TO BE USED IN THE MANNER INDICATED AND SHALL NOT BE REPRODUCED COPIED OR REPRODUCED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INVENTOR INC.		FINISH
Q'TY		SEE NOTE

LONGCHUANG ZHONGYE (HK) CO., LIMITED					
TITLE:		PART NO.:			
USB AF DIP 180° (I.Q. 0) 无参边 鱼叉脚		USAF -04*N-1*P68			
DR:	year 2014/12/10	DWG NO.:			
CHKD:	year 2014/12/10	AII-P68			
APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
		1:1	1/1	B	