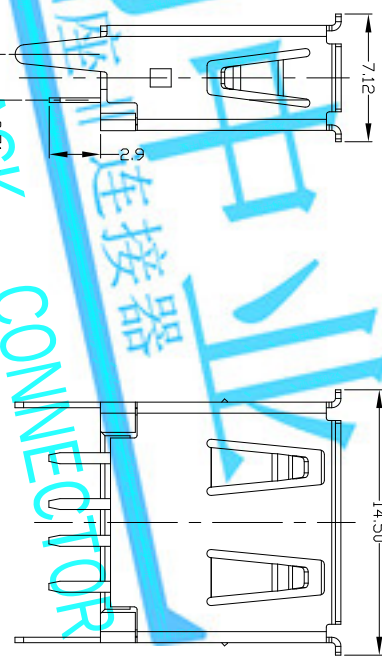
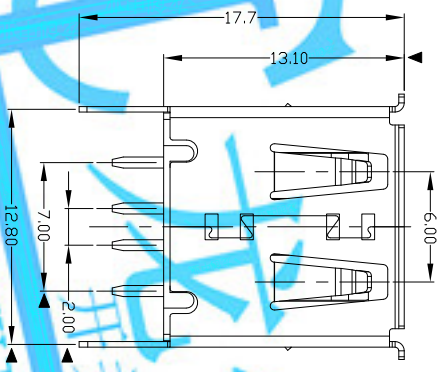



Bill of materials:

3	HOUSING	PBT+30%GF	1	UL94V-0	X: ±0.35	X: ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED	
					X ±0.3	X: ±1°	mm		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX°	MAT'L		
					.XXX ±0.15	.XXX°	SEE NOTE		
							FINISH		
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	SEE NOTE			DR: <i>yan</i> 2012/6/30	PART NO.: USAF-04*N-1*P66
					CHKD: <i>yan</i> 2012/6/30			DWG NO.: A11-P66	
					APPD: <i>yan</i> 2012/6/30			SCALE SHEET 1:1 1/1	
ND	PARTS	MATERIAL	QTY	FINISHING				REV. B	CUSTOMER DRAWING

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ/MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Umating Force: 10N MIN.
 - NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*N-1*P66

14u 10u" 64u 30u" 1PBT 2PA6T 3PA9T 4LCP W/WHITE B:BLACK