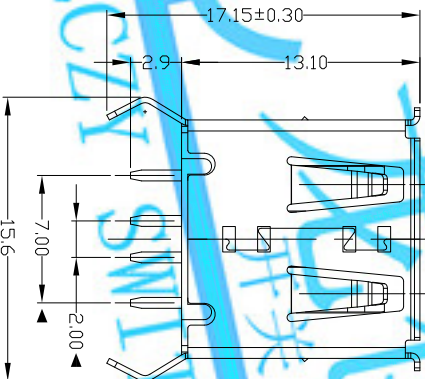



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q/C & IPQC.

4.PART NO.

USAF-04*N-1*P62

14u 11u
6Au 30u
W:WHITE
B:BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER
3	HOUSING	PBT+30%GF	1	UL94V-0	mm		USB A/F 180° DIP 13.1mm	USAF-04*N-1*P62	1:1	1/1	B	CUSTOMER
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	SEE NOTE		DR: 2012/6/30					
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	SEE NOTE		CHKD: 2012/6/30					
ND	PARTS	MATERIAL	QTY	FINISHING	QTY		APPD: 2012/6/30					

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

LONGCHUANG ZHONGYE (HK)CO.,LIMITED