
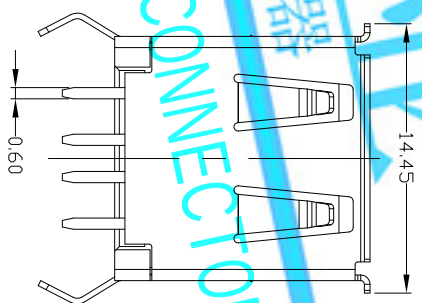
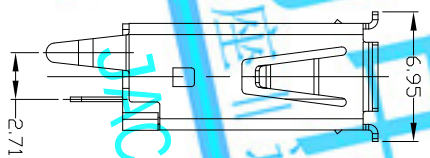
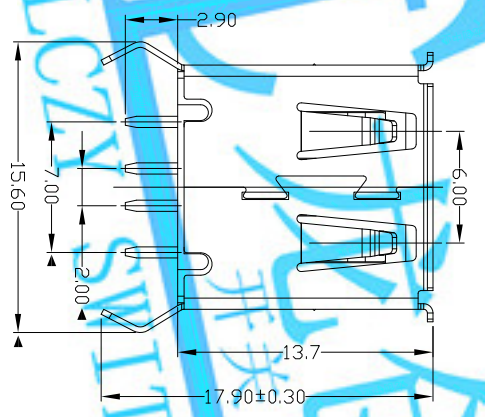


Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER
3	HOUSING	PBT+30%GF	1	UL 94V-0	mm		LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	SEE NOTE							
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	SEE NOTE							
ND	PARTS	MATERIAL	QTY	FINISHING	DR:	2012/6/30	USB A/F 180° DIP 13.7mm	USAF-04*N-1*P61	1:1	1/1	B	CUSTOMER

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:2AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55°C TD +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE:1.DIMENSIONS MARKED "V" TD BE CHECKED BY Q.C & IPQC.

4.PART NO.

