

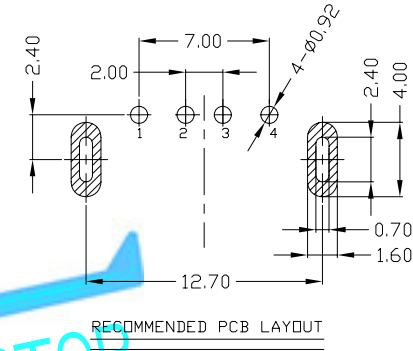


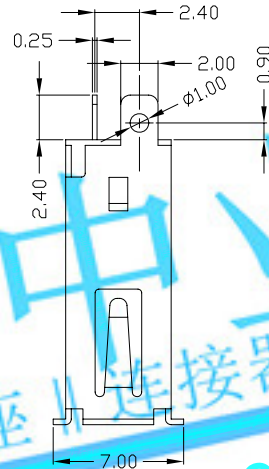


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

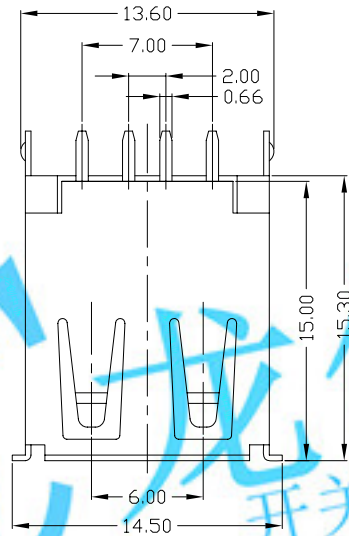

RECOMMENDED PCB LAYOUT



NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED '▼' TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*P37	
1-Au 1U'	W-WHITE
6-Au 30U'	B-BLACK
	1-PBT
	2-PA6T
	3-PA9T
	4-LCP

Bill of materials:

					X. ± 0.35	X.* $\pm 2^{\circ}$	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ± 0.3	.X* $\pm 1^{\circ}$	MAT'L	SEE NOTE		TITLE: USB AF 180° 插板长体(直脚)		PART NO.: USAF-04*N-1*P37		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ± 0.25	.XX*	FINISH							
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ± 0.15	.XXX*	SEE NOTE	Q'TY		DR: gan 2014/09/26		DWG NO.: AII-P37		
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		CHKD: gan 2014/09/26							
											APPD:		SCALE	SHEET
											1:1	1/1	B	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.