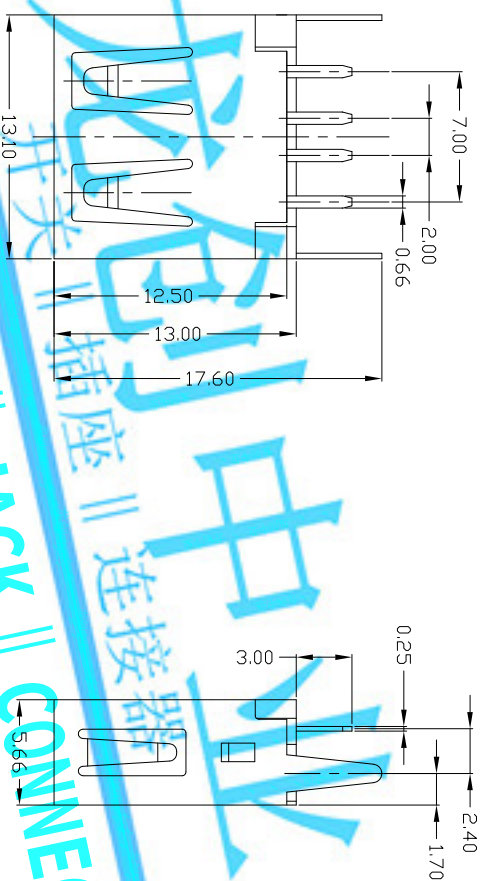


NOTES:

1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 30V AC;
 - 2) INSULATION RESISTANCE: 1000M Ω MIN;
 - 3) CONTACT RESISTANCE: 30m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55 $^{\circ}$ C TO +85 $^{\circ}$ C.
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04* $N-1$ *P36

1Au 1U' —

6Au 30U' —

1pBT —

2pA6T —

3pA9T —

4LCP —

W:WHITE
B:BLACK

[illegible]