

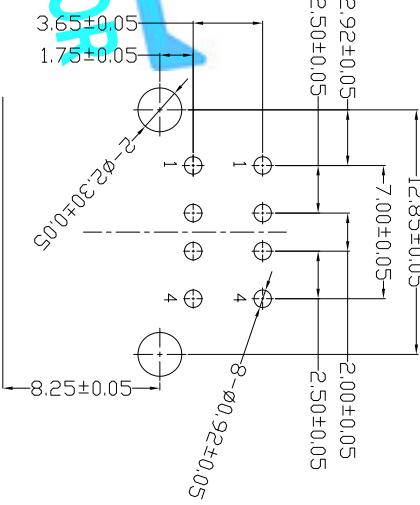
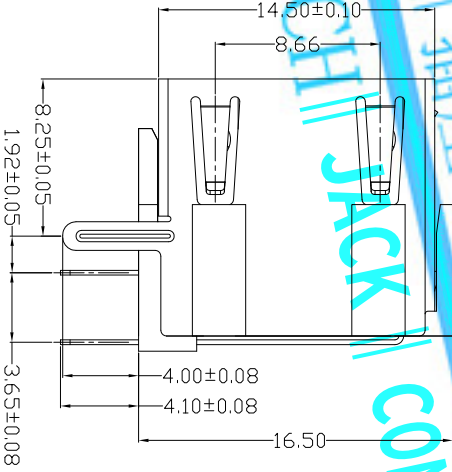


REV	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	-----	-------------	------	---------	------

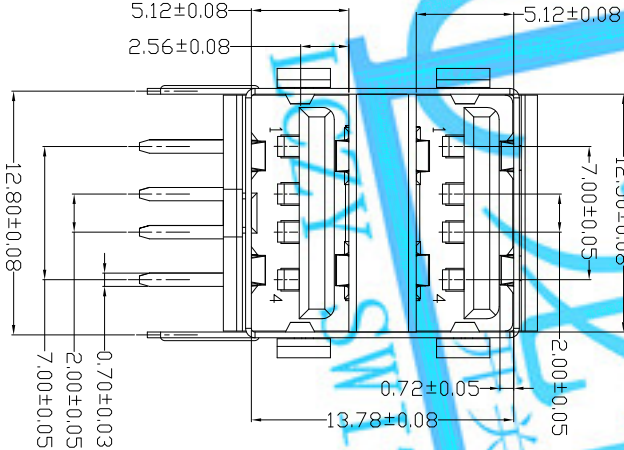

RoHS
Compliant
2002/95/EC

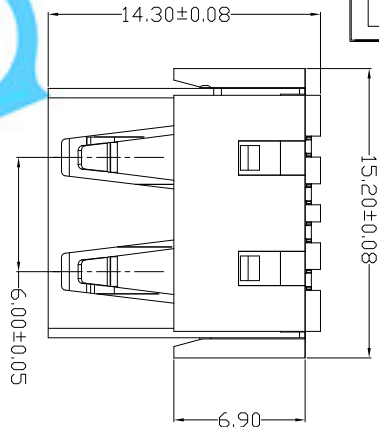

RECOMMENDED PCB LAYOUT

NOTES:
1.ELECTRICAL:
1)VOLTAGE CURRENT RATING:2AMP,30V DC;
2)INSULATION RESISTANCE: 1000MΩ MIN;
3)CONTACT RESISTANCE: 30mΩ MAX;
4)WITHSTANDING VOLTAGE: 500V AC FDR 1MIN;
5)OPERATING TEMPERATURE:-30°C TD +85°C.

2.Mechanical:
1)Mating Force: 35N MAX
2)Umating Force: 10N MIN.
3.DIMENSIONS MARKED "▲" TD BE CHECKED BY Q.C & IPQC

4. PART NO.
USAF-08*N-1XRJ50
1.4u 10"
6.4u 30u"
WHITE
BLACK
1PBT
2PAG1
3PBT
4LCP

Bill of materials:

5			X.	±0.15	X.*	±5°	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
4			X	±0.10	X*	±2°	MAT'L							
3	HOUSING	PBT+30%GF					SEE NDTE							
2	SHELL	COPPER ALLOY / SPCC					FINISH							
1	TERMINAL	COPPER ALLOY					SEE NDTE	Q'TY	DR: Ricky 2019/08/21	DWG NO.:	A11-RJ50	SCALE	SHEET	REV.
ND	PARTS	MATERIAL						APPD:	CHKD: Ricky 2019/08/21	1:1	1/1	B	CUSTOMER	DRAWING