


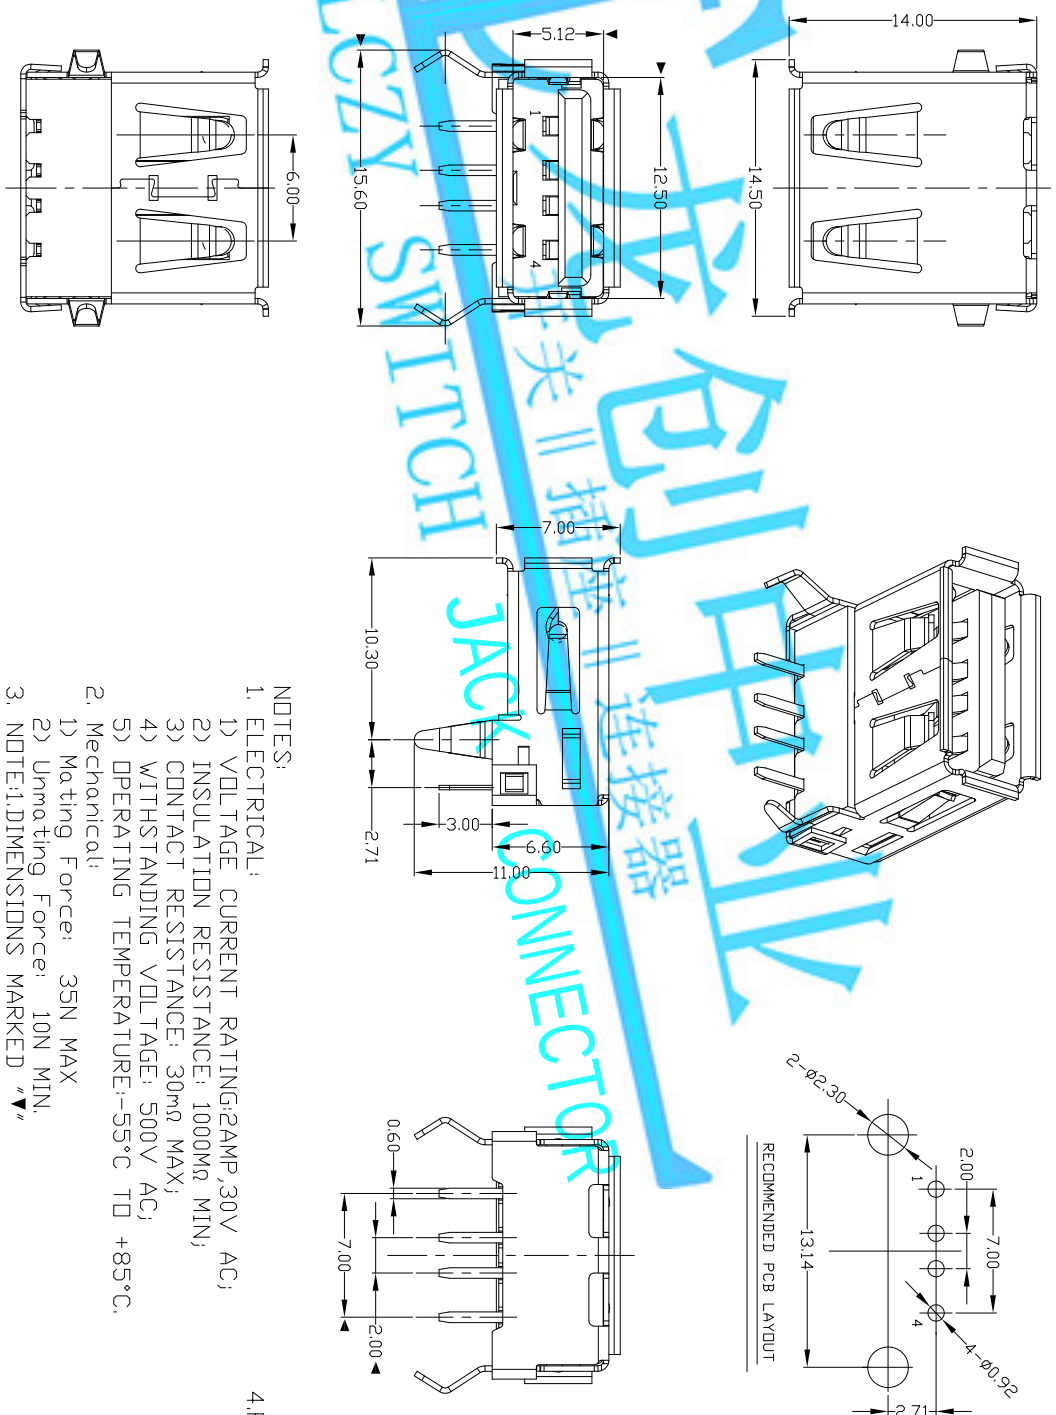

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:2AMP,30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55°C TD +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE:1.DIMENSIONS MARKED "▲" TD BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04* N -1* R615

1Au 1u" 6Au 30u"

W:WHITE
B:BLACK

1PBT
2PPA6T
3PPA9T
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	DWG NO.:	SCALE	SHEET	REV.	CUSTOMER DRAWING
3	HOUSING	PBT	1	UL94V-0	MAT'L		SEE NOTE	USAF-04* N -1* R615	A11-R615	1:1	1/1	B	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	FINISH		SEE NOTE						
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	Q'TY		SEE NOTE						
ND	PARTS	MATERIAL	QTY	FINISHING	Q'TY		APPD:						

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

