




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

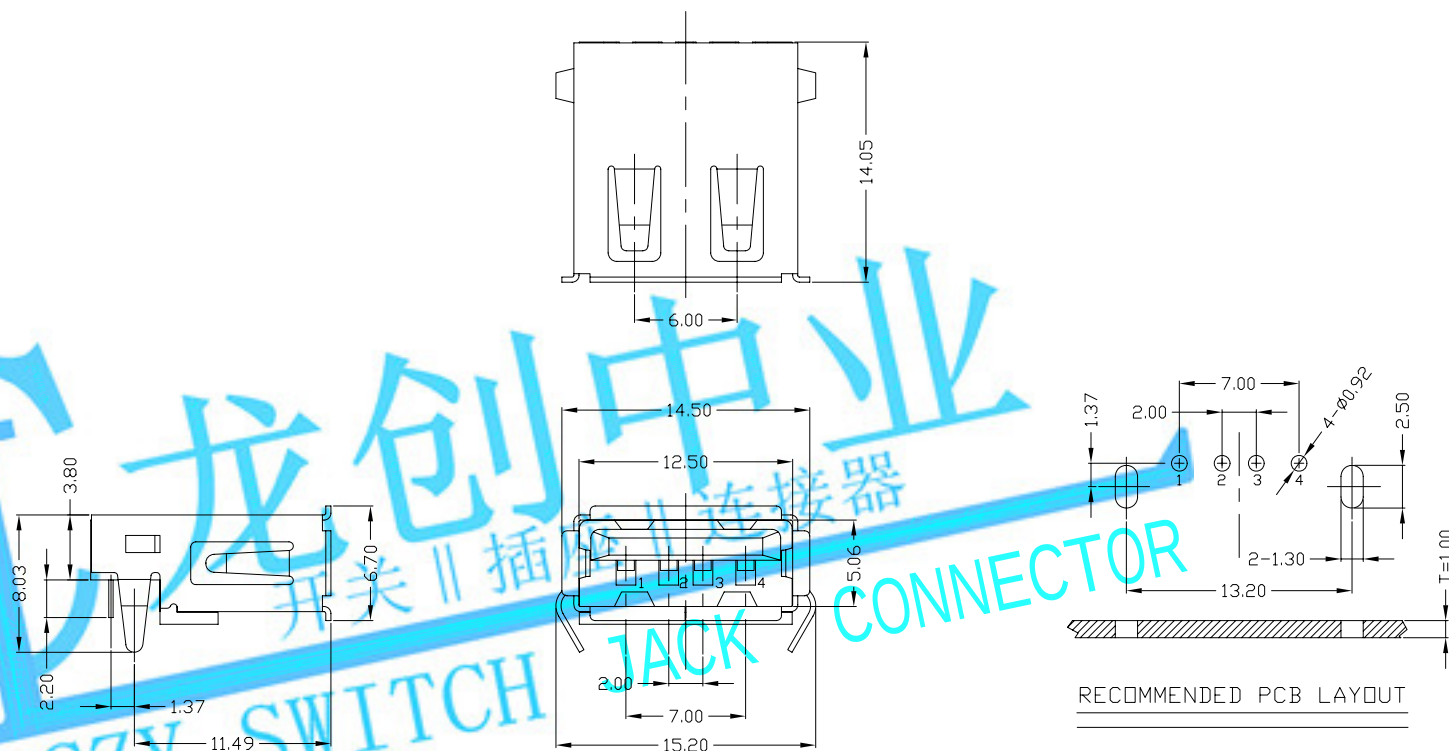

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R301

1: 1Au 1U"
6: 6Au 30U"

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ± 0.35	X. $\pm 2^*$	UNITS	LONGCHUANG ZHONGYE (HK) CO., LIMITED			
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ± 0.3	.X $\pm 1^*$	mm	TITLE: USB AF 90° 插板式 (超薄079)			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ± 0.25	.XX $\pm 1^*$	MAT'L				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ± 0.15	.XXX $\pm 1^*$	SEE NOTE	PART NO.: USAF-04*N-1*R301			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.								DWG NO.: AII-R301			
								SCALE: 1:1			
								SHEET: 1/1			
								REV.: B			
								CUSTOMER DRAWING			