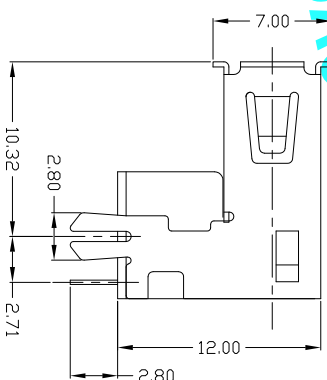
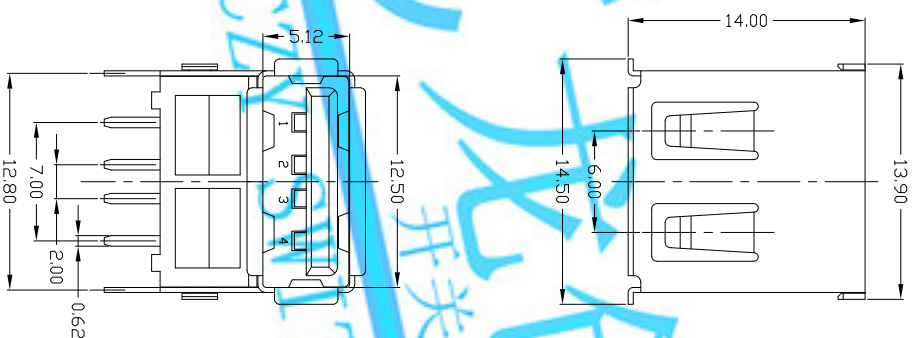


RECOMMENDED PCB LAYOUT

- NOTES:
1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000M Ω /MIN;
 - 3) CONTACT RESISTANCE: 30m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
 4. PART NO.

USAF-04*N-1*R304

1Au 1U'
6Au 30U'

W/WHITE
B/BLACK
1PBT
2P/6T
3P/9T
4LCP

					X. ±0.35	X.° ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
					.X ±0.3	.X° ±1°	MAT'L					mm		
3	HOUSING	PBT+30%GF	1	UL94V-0	.XX ±0.25	.XX°	SEE NOTE							
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX°	FINISH							
							SEE NOTE							
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK) CO., LIMITED. NO PARTS OF THIS DOCUMENT OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INNOTECH INC.				Q'TY					
ND	PARTS	MATERIAL	QTY	FINISHING					APPD:		SCALE SHEET	REV.	CUSTOMER DRAWING	
											1:1	1/1	B	
										</				