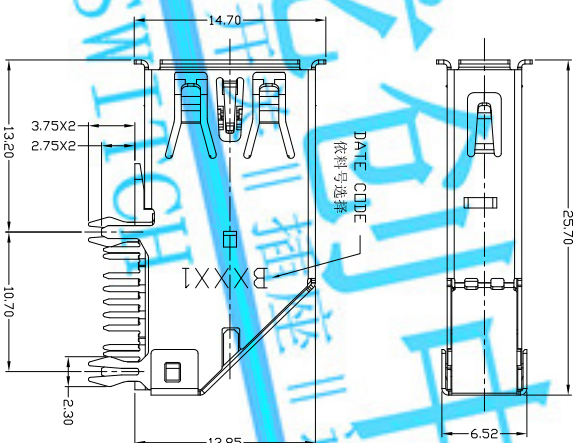
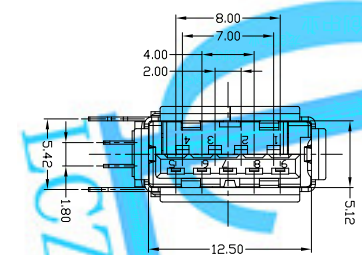
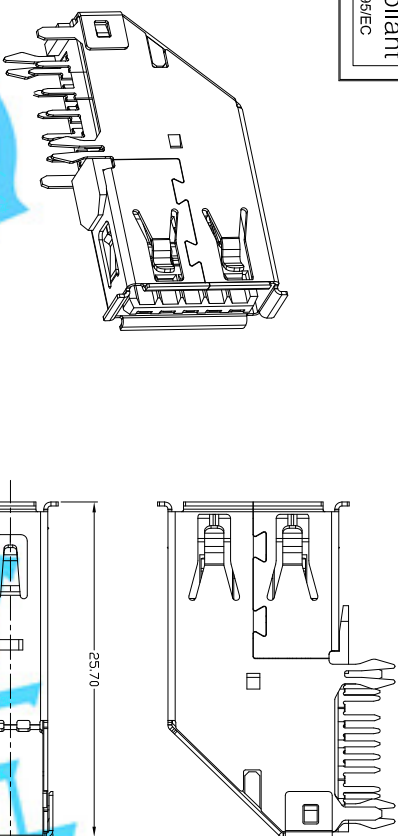


Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX -
2	D -	6	SSRX +
3	D +	7	GND
4	GND	8	SSTX -
Shell	Shield	9	SSRT +

RECOMMENDED PCB LAYOUT

PCB EDGE

4. PART NO.

USAF-09*N-4BLC10

1Au 1U⁺
5Au 15U⁺
6Au 30U⁺

1PBT
2PA6T
3PA9T
4LCP

W/WHITE
B:BLACK
BL:BLUE

NOTES:

1. ELECTRICAL:
 - 1) CURRENT RATING:18AMP;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 50mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-55°C ~ +85°C.
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

Bill of materials:

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
		UNITS							
		mm		MAT'L					
4	SHELL	STAINLESS STEEL	1	PLATED NICKEL	X. ±0.35	X.* ±2*			
					.X ±0.3	.X* ±1*			
3	TERMINAL2	COPPER ALLOY	5	PLATED GOLD/TIN	.XX ±0.25	.XX*	SEE NOTE		
2	TERMINAL1	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH		
					SEE NOTE				
1	HDOUSING	LCP/PBT+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED. NO PARTS OR SHAL BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.				
					Q'TY				
ND	PARTS	MATERIAL	QTY	FINISHING			APPD:		
TITLE:					PART NO.:				
USB 3.0 AF 90度 侧插式 外壳卷边 小鱼叉脚					USAF-09*N-4BLCC10				
DR: yom 2016/08/30					DWG NO: A11-CC10				
CHKD: yom 2016/08/30					SCALE SHEET REV. CUSTOMER DRAWING				
					1:1	1/1	B		