

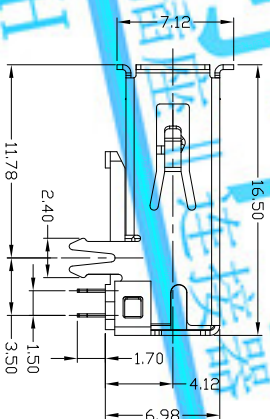


PIN NUMBER	SIGNAL NAME
1	V _{BUS}
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

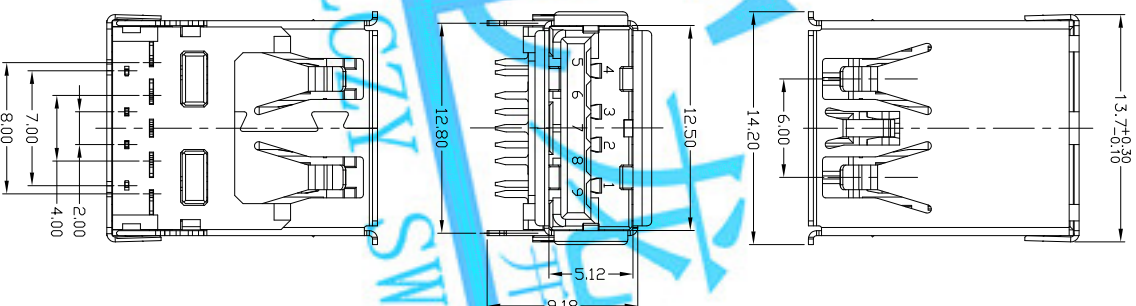

RECOMMENDED PCB LAYOUT

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
		X. ±0.35		X. ±2°		UNITS			
		.X ±0.3		.X° ±1°		MAT'L		mm	
3	SHELL	STAINLESS STEEL		1		PLATED NICKEL		SEE NOTE	
2	TERMINAL	COPPER ALLOY		9		PLATED GOLD/TIN		FINISH	
1	HOUSING	LCP+30%GF		1		UL94V-0		SEE NOTE	
NO	PARTS	MATERIAL		QTY		FINISHING		DR: <i>year</i> 2016/08/30	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.									
						Q'TY		SCALE SHEET REV.	
						APPD:		1:1 1/1 B CUSTOMER DRAWING	
								DWG NO.: A11-RC110	
								USAF-09*1-4BLRC110	
								TITLE: USB 3.0 AF D1P 90度 反向卷边 鱼叉脚	

NOTES:

1. ELECTRICAL:

4. PART NO

USAF-09*N-4BLRC110

14u 10u

54u 15u
64u 30u

1PBT
2PA6T
3PA9T
4LCP

W:WHITE
B:BLACK
BL:BLUE