





RoHS
Compliant
2002/95/EC





REV.	ECN.	NO.	APPD.

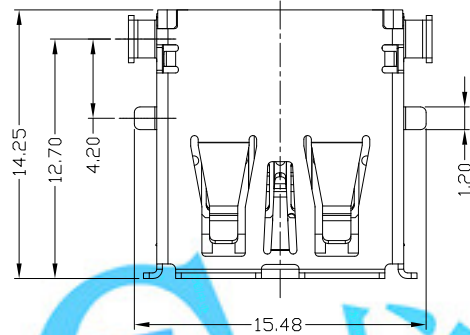

Pin #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

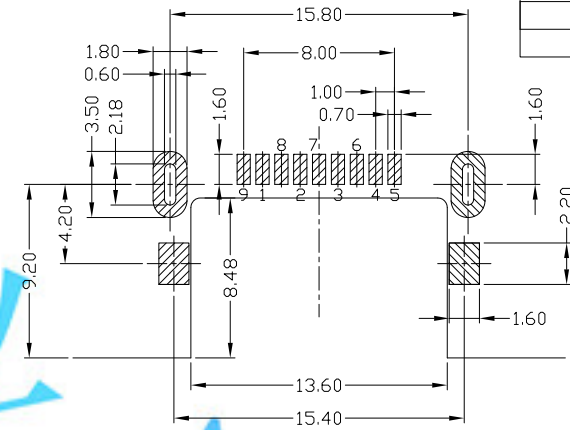

RECOMMENDED PCB LAYOUT

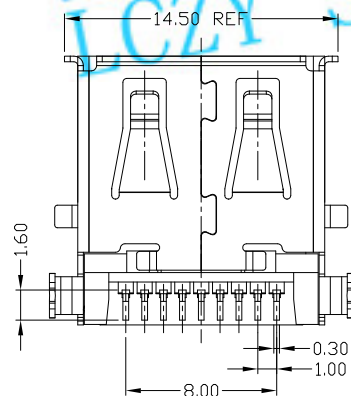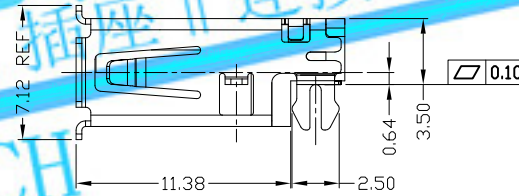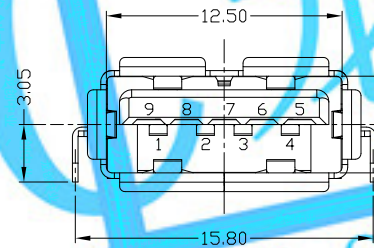

NOTES:

- ELECTRICAL:
 - CURRENT RATING:1.5AMP;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-25°C ~ +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-09*N-4BLVC10

W:WHITE
B:BLACK
BL:BLUE

1:1U*
5:15U*
6:30U*

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

					X. ±0.35	X.* ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1°	MAT'L					
					.XX ±0.25	.XX*	SEE NOTE	TITLE: USB 3.0 AF沉板 SMT 卷边鱼叉脚		PART NO.: USAF-09*N-4BL VC10		
2	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH	DR: <i>gan</i> 2016/12/1		DWG NO.: AII-VC10		
1	HOUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	CHKD: <i>gan</i> 2016/12/1				
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY		APPD:		SCALE 1:1	SHEET 1/1