

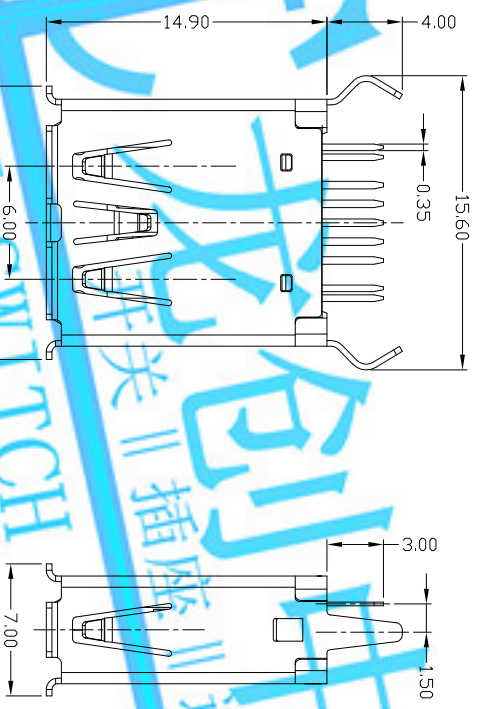



PIN NUMBER	SIGNAL NAME
1	V-BUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shield	Shield

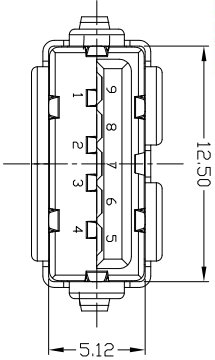


- NOTES:
1. ELECTRICAL:
- 1) CURRENT RATING:1.5AMP;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-40°C ~ +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TD BE CHECKED BY Q.C & IPQC.

4. PART NO.



RECOMMENDED PCB LAYOUT

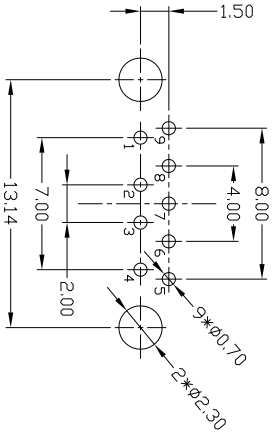

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
1	HOUSING	LCP/PBT/PA9T	1	UL94V-0
2	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN
3	SHELL	COPPER ALLOY	1	PLATED NICKEL
E				

X: ±0.35	X': ±2'	UNITS	mm
X ±0.3	X' ±1'	MAT'L	SEE NDT
.XX ±0.25	.XX'	FINISH	SEE NDT
.XXX ±0.15	.XXX'	SEE NOTE	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTCH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTCH INC.			
Q'TY			
APPD:			
TITLE:			
DR: 2016/08/30			
CHKD: 2016/08/30			
SCALE			
SHEET			
REV.			
CUSTOMER DRAWING			

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

REV.	ECN.	NO.	APPD.