



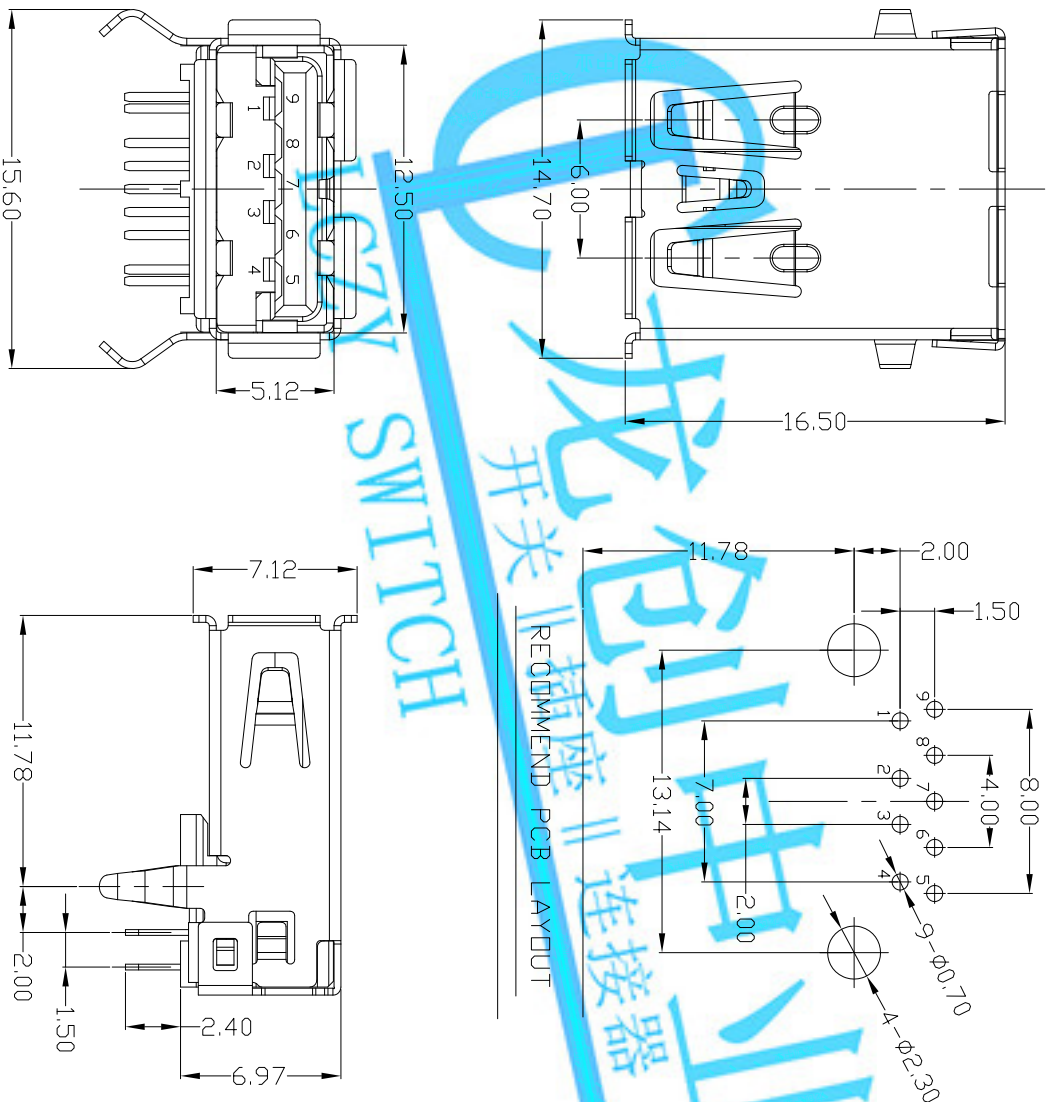

Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	StdA_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	StdA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FRIST

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 18AMP,30V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
4. PART NO.



Bill of materials:

4	HOUSING	PBT+30%GF	1	UL94V-0	X: ±0.35	X: ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
							mm					
3	SHELL	COPPER ALLOY	1	PLATED TIN/NICKEL	X ±0.3	X' ±1°	MATL					
					.XX ±0.25	.XX°	SEE NOTE					
2	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	FINISH					
							SEE NOTE					
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC			Q'TY				
ND	PARTS	MATERIAL	QTY	FINISHING						APPD:		
					TITLE: USB A/B3.0 单层90度有卷边两脚插板			PART NO.: USAF-09XN-1BLRA0		DWG NO.: AII-RA0		
					DR: 2017/3/15			CHKD: 2017/3/15		SCALE SHEET 1/1		
								REV. B		CUSTOMER DRAWING		