


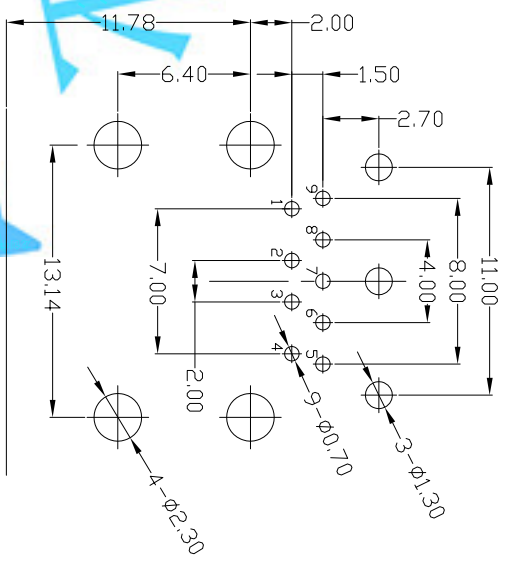
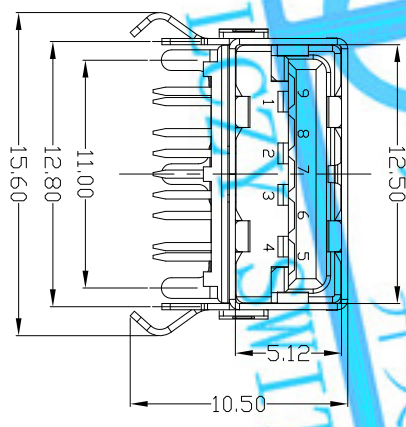


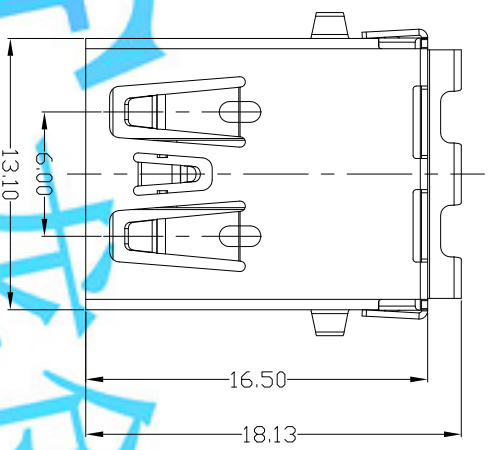

RECOMMEND PCB LAYOUT

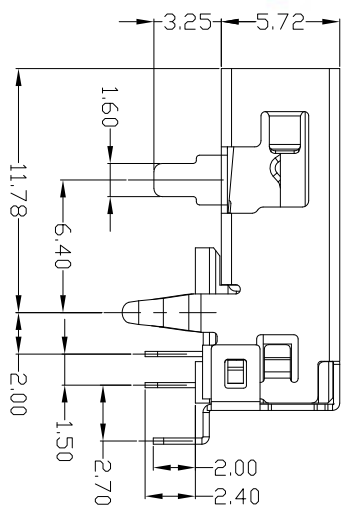

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 18AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Umating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY QC & IPQC.
 - PART NO.



Bill of materials:

4	HOUSING	PBT+30%GF	1	UL94V-0	X: ±0.35	X: ±2°	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED TITLE: USB A/F3.0 单层90度 平口 7脚插板 DR: gan 2017/3/15 CHKD: gan 2017/3/15 APPD: 1:1 PART NO.: USAF-09XN-1BLRA2 DWG NO.: AII-RA2 SCALE SHEET 1/1 REV. B CUSTOMER DRAWING			
3	SHELL	COPPER ALLOY	1	PLATED TIN/NICKEL	.X ±0.3	.X' ±1°	MAT'L					
2	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XX ±0.25	.XX°	FINISH	SEE NOTE				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	SEE NOTE					
ND	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK) CO., LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK) CO., LIMITED			Q'TY				