
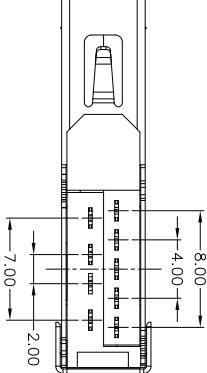
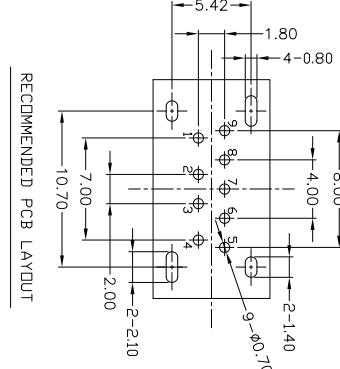



PIN NUMBER	SIGNAL NAME
1	V BUS
2	D -
3	D +
4	GND
5	SSRX -
6	SSRX +
7	GND
8	SSTX -
9	SSTX +
Shield	Shield

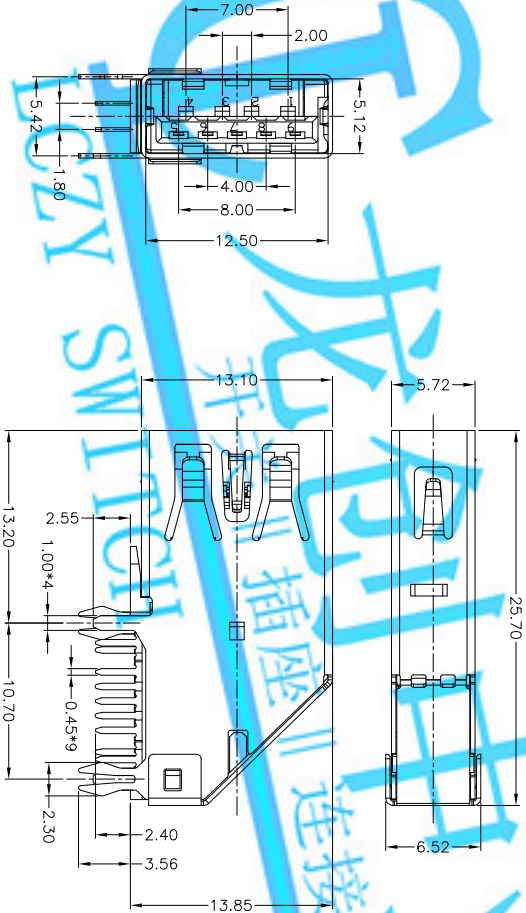

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:18AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-55℃ TD +85℃.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE:DIMENSIONS MARKED ∇ TD BE CHECKED BY Q/C & IPQC.

USAF-09* ∇ N-4BLCC14

1Au 10"
5Au 150"
6Au 300"

W/WHITE
B/BLACK
BL/BLUE
IP/BT
2P/AGT
3P/AGT
4/LCP

4. PART NO.

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	DESCRIPTION
1	TERMINAL1	COPPER ALLOY	5	PLATED GOLD/TIN	SEE NOTE		
2	TERMINAL2	COPPER ALLOY	4	PLATED GOLD/TIN	SEE NOTE		
3	HOUSING	LCP/PBT+30%GF	1	UL 94V-0	SEE NOTE		
4	SHELL	STAINLESS STEEL	1	PLATED NICKEL	SEE NOTE		
5	TERMINAL1	COPPER ALLOY	5	PLATED GOLD/TIN	SEE NOTE		
6	PARTS	MATERIAL	QTY	FINISHING	SEE NOTE		

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE:	USB 3.0 A 90度 侧插式 外壳无盖边	小童叉脚 成品图
DR:	gan	2017/1/14
CHKD:	gan	2017/1/14
APPD:	gan	2017/1/14
PART NO.:	USAF-09* ∇ N-4BLCC14	
DWG NO.:	USAF-09* ∇ N-4BLCC14	
SCALE	1:1	1/1
SHEET	1	1
REV.	B	
CUSTOMER	DRAWING	