

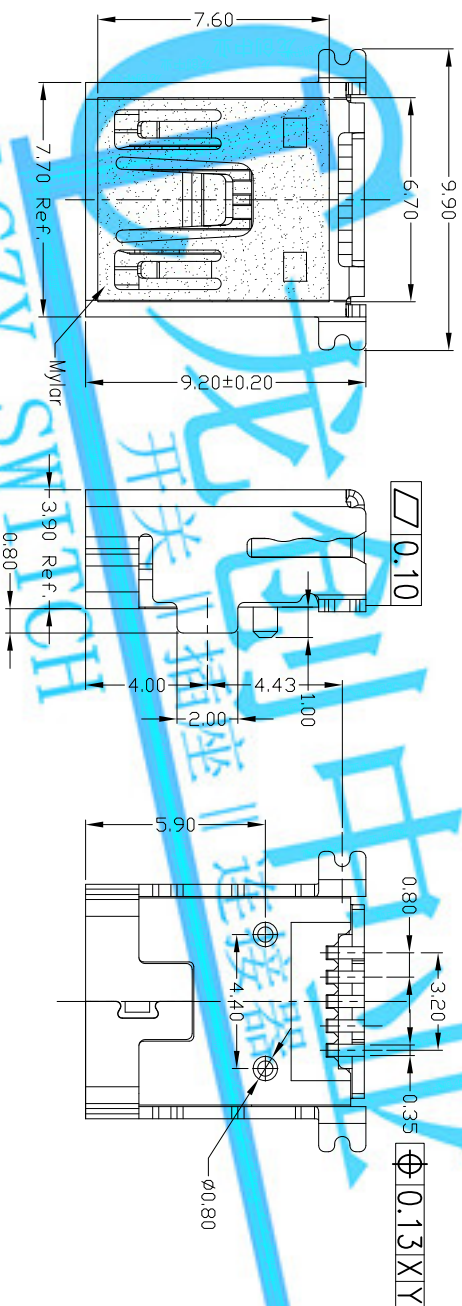





RECOMMENDED P.C.B LAYOUT

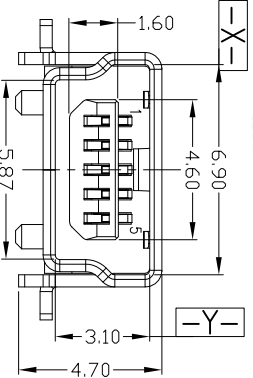

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE: -25°C TD +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Umating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TD BE CHECKED BY Q.C & IPQC.
4. PART ND.
- MUBF-05JN-4BHUA353-M
- 1Au 10" W/WHITE
6Au 30u" B/BLACK
NICKEL
T1Ni
- 1PBT
2PAGT
3PAGT
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
5					X: ±0.15	Ang1°	TITLE: MINI USB 5P F SWT B Type 前插后贴有佳贴麦拉 DR: Ricky 2017/10/11 CHKD: Ricky 2017/10/11 APPD: 2017/10/11 PART NO.: MUBF-05JN-4BHUA353-M DWG NO.: A11-HUA353 SCALE SHEET REV. 4.1 1/1 B CUSTOMER DRAWING
4					XX: ±0.10		
3	SHELL	COPPER ALLOY	1	PLATED NICKEL/TIN	SEE NOTE		
2	HOUSING	LCP+30%GF	1	UL94V-0	FINISH		
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	SEE NOTE		
ND	PARTS	MATERIAL	QTY	FINISHING	QTY		