
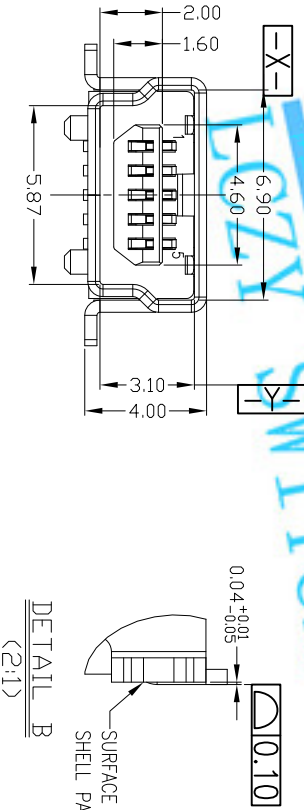
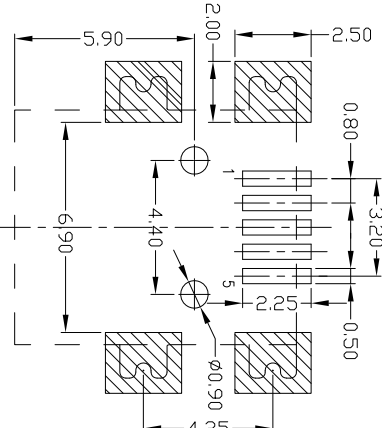



REV	LTR	DESCRIPTION	DATE	REVISER	APPD

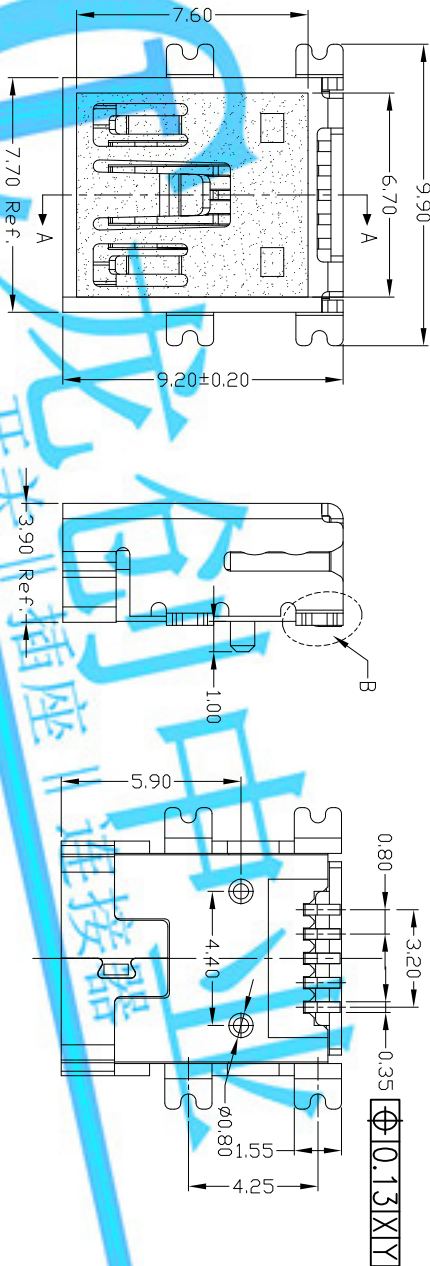

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 10AMP, 30V AC;
 - INSULATION RESISTANCE: 100M Ω MIN;
 - CONTACT RESISTANCE: 50m Ω MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE: -25°C TD +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Umating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TD BE CHECKED BY Q.C & IPQC.
4. PART ND.
- MUBF-05XT-4BHUA152-M
- 14u 10"
6Au 30u"
NICKEL
T1Ni
- W/WHITE
B/BLACK
- 1PBT
2P/4GT
3P/4GT
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER
5					X: ±0.15	Angl°	MINI USB 5P F SWT B Type	MUBF-05XT-4BHUA152-M	4.1	1/1	B	CUSTOMER
4					XX ±0.10		4.25有柱(Post=1.0H)插接板					
3	SHELL	COPPER ALLOY	1	PLATED TIN/NICKEL	.XXX ±0.05		DR: 2017/10/11					
2	HOUSING	LCP+30%GF	1	UL94V-0			2017/10/11					
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN			CHKD: 2017/10/11					
ND	PARTS	MATERIAL	QTY	FINISHING			APPD: 2017/10/11					