REV	LTR	DESCRIPTION	DATE	REVISER	APPD

Pb Process Capable

RoHS Compliant 2002/95/EC

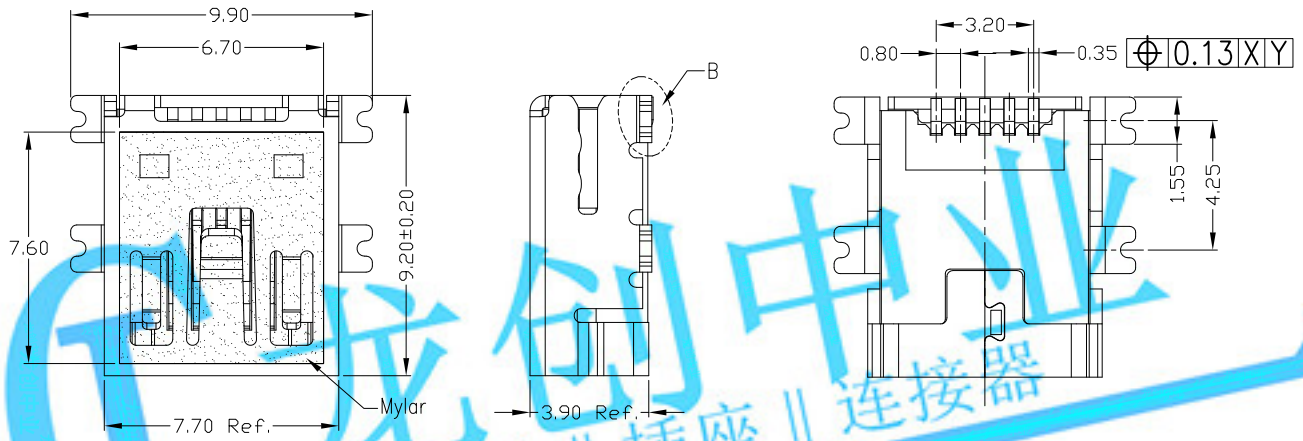



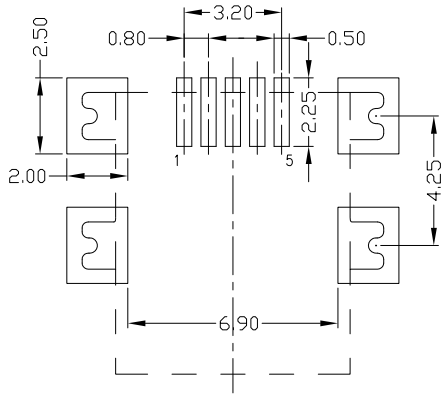

RECOMMENDED P.C.B LAYOUT

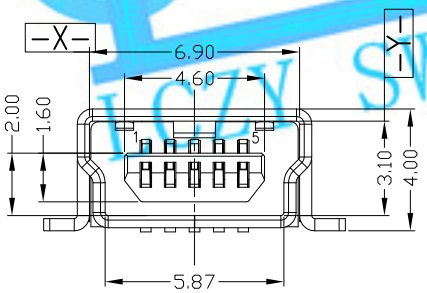



DETAIL B
(2:1)

NOTES:
1. ELECTRICAL:
   1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
   2) INSULATION RESISTANCE: 100MΩ MIN;
   3) CONTACT RESISTANCE: 50mΩ MAX;
   4) WITHSTANDING VOLTAGE: 300V AC;
   5) OPERATING TEMPERATURE: -25°C TO +85°C.
2. Mechanical:
   1) Mating Force: 35N MAX
   2) Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
4. PART NO.

MUBF-05*T-4BHUA637-M

1:Au 1U"
6:Au 30U"

N:NICKET
T:TIN

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5				
4				
3	SHELL	COPPER ALLOY	1	PLATED TIN/NICKEL
2	HOUSING	LCP+30%GF	1	UL94V-0
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN

.X ±0.15	Ang1°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
.XX ±0.10		MAT'L SEE NOTE	
.XXX ±0.05		FINISH SEE NOTE	
		Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC ,AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

TITLE: MINI USB 5P F SMT B Type 4.25无柱贴麦拉	PART NO.: MUBF-05XT-4BHUA637-M
DR: Ricky 2017/10/11	DWG NO.: AII-HUA637
CHKD: Ricky 2017/10/11	SCALE 4:1 / SHEET 1/1 / REV. B / CUSTOMER DRAWING
APPD:	

龙创中业 开关 || 插座 || 连接器 LCZY SWITCH