





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

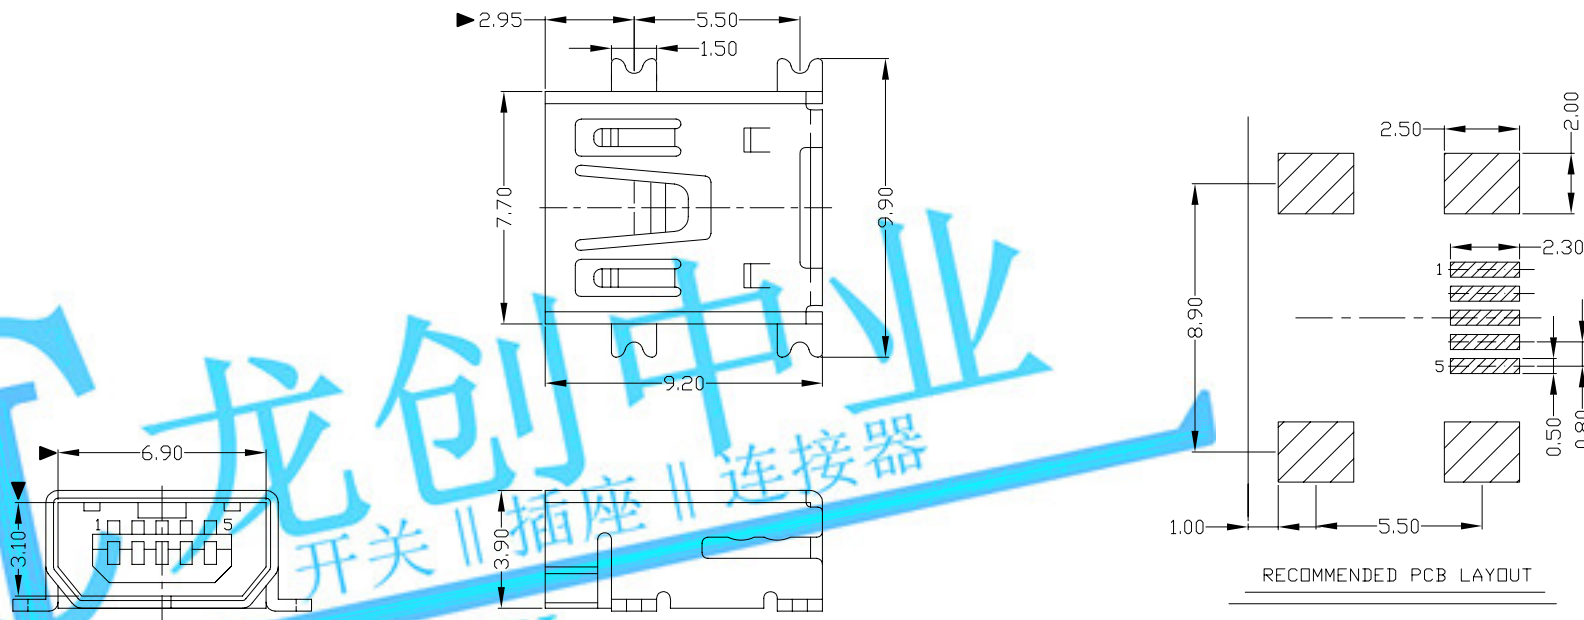

龙创中业
开关 || 插座 || 连接器
LCZY SWITCH

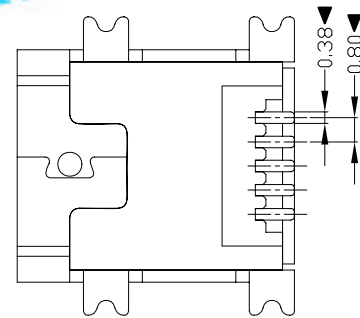

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
MUNF-05*N-4BH85

1:Au 1U*
6:Au 30U*

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	mm
3	HOUSING	LCP	1	UL94V-0	.X ±0.3	.X* ±1*	MAT'L	SEE NOTE
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH	SEE NOTE
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	Q'TY	SEE NOTE
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.</small>								
								APPD:

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE: MINI USB 5P/F SMT (AB型双卡点无柱)

PART NO.: MUNF-05*N-4BH85

DR: gan 2012/7/02

DWG NO.: AII-H85

CHKD: gan 2012/7/02

SCALE: 1:1

SHEET: 1/1

REV: B

CUSTOMER DRAWING