

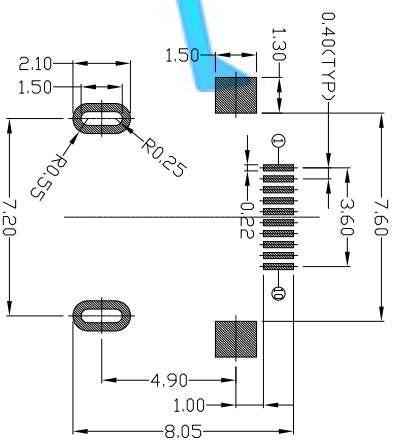

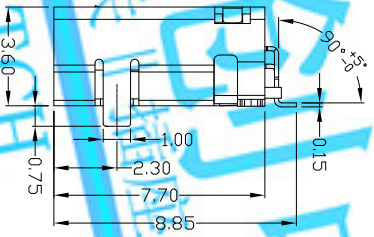



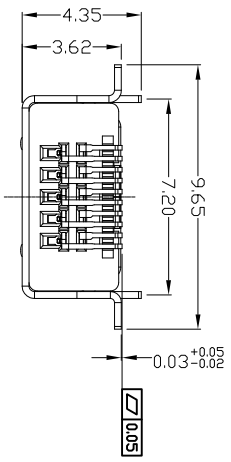

RECOMMENDED PCB LAYOUT



- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 10AMP,100V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 50mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-30°C TO +80°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 7N MIN
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUNF-101T-4BVS19-M

14u 1u" W/WHITE
6Au 30u" B/BLACK

1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

3	HOUSING	LCP+30%GF	1	UL94V-0	X: ±0.35	X: ±.2*	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
					X: ±0.3	X: ±.1*	MAT'L	
2	SHELL	STAINLESS STEEL	1	PLATED TIN	.XX ±0.25	.XX*	SEE NOTE	
					.XXX ±0.15	.XXX*	FINISH	
							SEE NOTE	
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY
ND	PARTS	MATERIAL	QTY	FINISHING				APPD:
TITLE: MINI USB 10PIN PHILLIPS 母座插 TYPE 无柱(插体) PART NO.: MUNF-10IT-4BV\$19-M								DR: <i>gan</i> 2014/09/25
								CHKD: <i>gan</i> 2014/09/25
								DWG NO.: A11-V\$19-M
SCALE			SHEET	REV.	CUSTOMER DRAWING			
1:1			1/1	B				