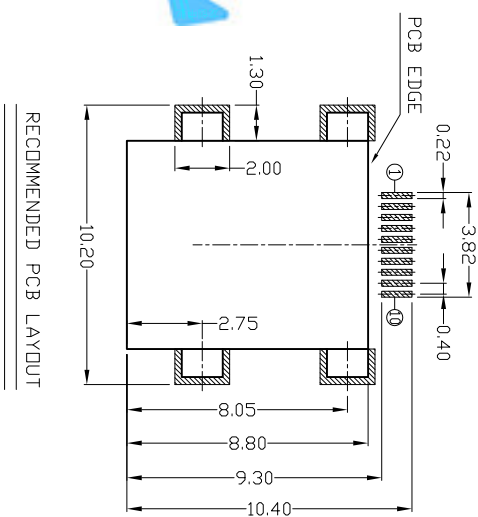
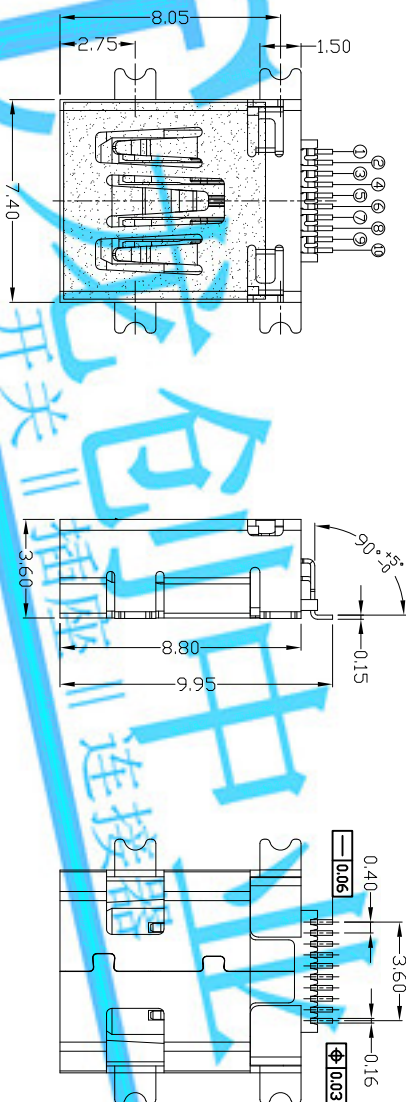


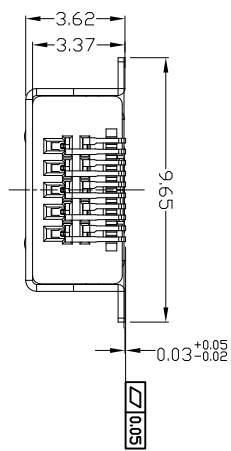


- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 10AMP,100V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 50mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-30°C TO +80°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUNF-101T-4BVS17-M

1Au 1U"
6Au 30U"

W:WHITE
B:BLACK
1:PB
2:PA6T
3:PA9T
4:LCP

Bill of materials:

3	HOUSING	LCP+30%GF	1	UL94V-0	X: ±0.35	X: ±2"	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
2	SHELL	STAINLESS STEEL	1	PLATED TIN	X ±0.3	X: ±1"	MAT'L						
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	.XX ±0.25	.XX'	SEE NOTE						
N/D	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'	FINISH						
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.								
					SEE NOTE								
					Q'TY								
													
													
					APPD:								
					DR: <u>gan</u> 2014/09/25				TITLE: MINI USB 10PIN PHILLIPS 母座AB TYPE 全贴片注				
					CHKD: <u>gan</u> 2014/09/25				PART NO.: MUNE-101T-4BVS17-M				
					DWG NO.: A11-VS17-M								
					SCALE SHEET 1:1				REV. 1/1		CUSTOMER DRAWING		