
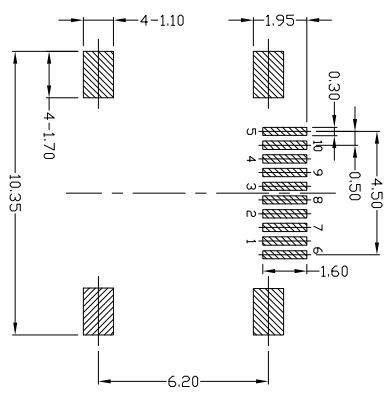

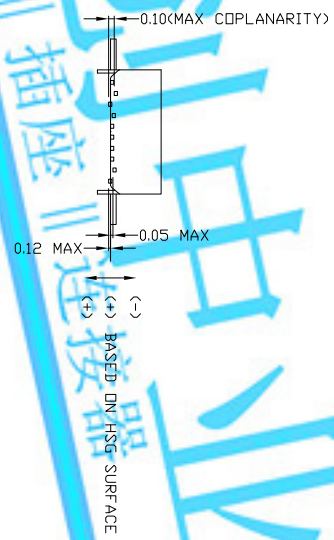




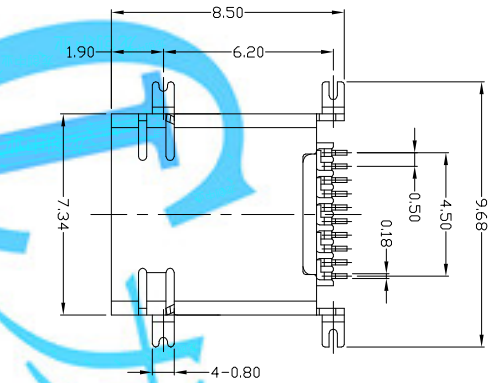

RECOMMENDED PCB LAYOUT(TOP SIDE)
TOLERANCE=±0.05

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,100V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-30°C TO +80°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUNF-101T-4BVS40

1:AU 1U"
6:AU 30U"
W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCF

Bill of materials:

3	HDUSING	LCP+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED TIN
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

X: ±0.35	X': ±2"	UNITS
X: ±0.3	X': ±1"	MAT'L
.XX ±0.25	.XX'	SEE NOTE
.XXX ±0.15	.XXX'	FINISH
		SEE NOTE
		Q'TY

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE: MINI USB 10PIN FEMALE SMT TYPE		PART NO.: MUNF-101T-4BVS40	
DR: <i>gan</i> 2018/07/12		DWG NO.: A11-VS40	
CHKD: <i>gan</i> 2018/07/12		SCALE SHEET REV. B	
APPD:		CUSTOMER DRAWING	