

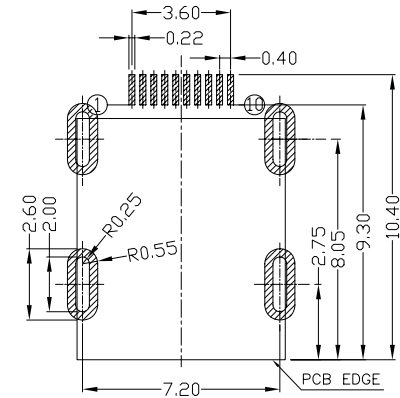

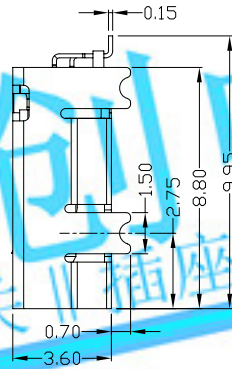
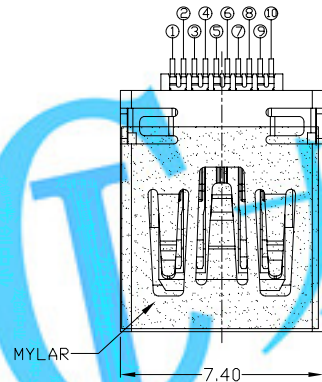





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT



NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,100V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUNF-101T-4BVS110-M

1:Au 1U"
6:Au 30U"

W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
					.X ±0.3	.X.* ±1°	mm					
2	SHELL	STAINLESS STEEL	1	PLATED TIN	.XX ±0.25	.XX*	SEE NOTE		TITLE: MINI USB 10PIN PHILIPS 母座AB TYPE全插无柱	PART NO.: MUNF-101T-4BVS110-M		
					.XXX ±0.15	.XXX*	FINISH					
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE		DR: gan 2014/06/21	DWG NO.: AII-VS110-M		
							Q'TY	CHKD: gan 2014/06/21				
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING