
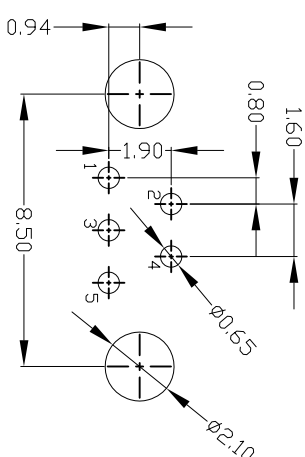
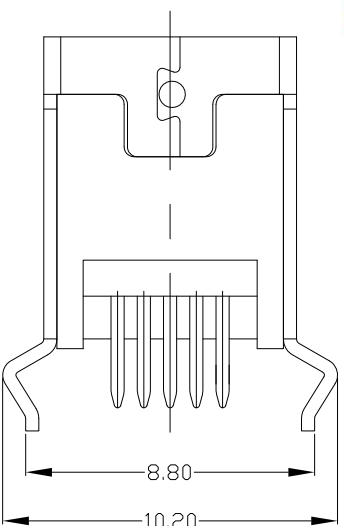


LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		MINI USB 5P/F 180° DIP B型 (弯脚)							
PART NO.:		MUBF-05* N-4BP80							
DWG NO.:		A11-P80							
SCALE		SHEET		REV.		CUSTOMER			
1:1		1/1		B		DRAWING			
APPD:									
CHKD:		gan 2012/7/02							
DR:		gan 2012/7/02							
Q'TY		SEE NOTE							
FINISH		SEE NOTE							
UNITS mm		MATE'L							
X. ±0.35		X. ±2°							
.X ±0.3		.X° ±1°							
.XX ±0.25		.XX°							
.XXX ±0.15		.XXX°							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDUSTRIAL INC.									
Q'TY		Q'TY							
APPD:		APPD:							
CHKD:		CHKD:							
DR:		DR:							
Q'TY		Q'TY							
FINISH		FINISH							
UNITS mm		UNITS mm							
MATE'L		MATE'L							
X. ±2°		X. ±0.35							
.X° ±1°		.X ±0.3							
.XX°		.XX ±0.25							
.XXX°		.XXX ±0.15							
PLATED NICKEL		.XX ±0.25							
PLATED GOLD/TIN		.XXX ±0.15							
QTY		QTY							
FINISHING		FINISHING							
MATERIAL		MATERIAL							
PARTS		PARTS							
1		1							
2		2							
3		3							
HOUSING		HOUSING							
LCP		LCP							
COPPER ALLOY		COPPER ALLOY							
COPPER ALLOY		COPPER ALLOY							
TERMINAL		TERMINAL							
COPPER ALLOY		COPPER ALLOY							
QTY		QTY							
FINISHING		FINISHING							
MATERIAL		MATERIAL							
PARTS		PARTS							

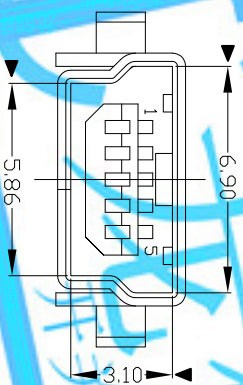

NOTES:

1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 1.0AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 100M Ω MIN;
 - 3) CONTACT RESISTANCE: 50m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 300V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 30N MAX
 - 2) Umating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- 4.PART NO

MUBF-05*N-4BP80

1: Au 1U⁺
6: Au 30U⁺

1: PBT
2: PAgT
3: PAgT
4: LCP

W: WHITE
B: BLACK