

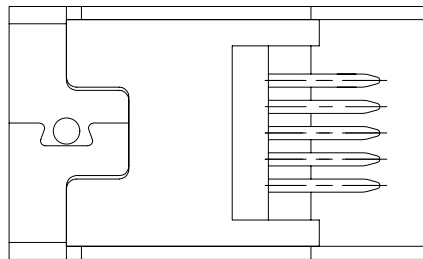
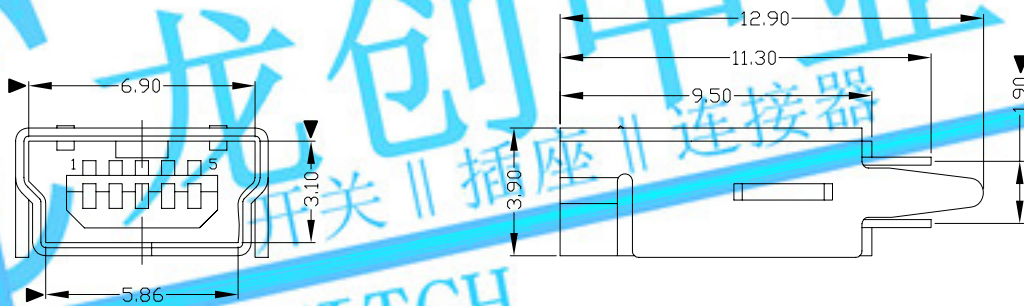


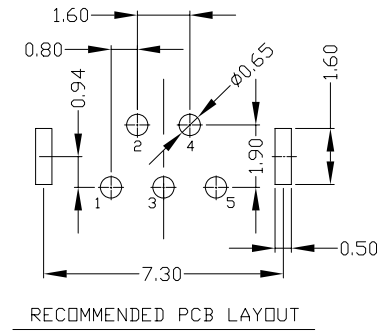

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

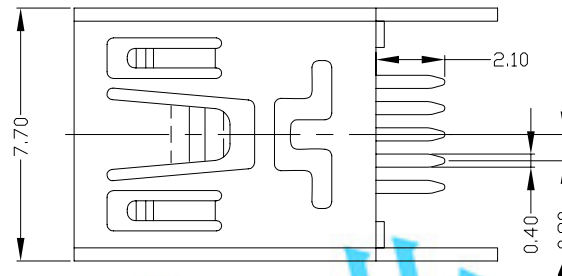

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 100M Ω MIN;
- 3) CONTACT RESISTANCE: 50m Ω MAX;
- 4) WITHSTANDING VOLTAGE: 300V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 30N MAX
- 2) Unmating Force: 7N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBF-05*N-4BP81

1:Au 1U"
6:Au 30U"

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ± 0.35 .X ± 0.3 .XX ± 0.25 .XXX ± 0.15	X.* $\pm 2^*$.X.* $\pm 1^*$.XX.* .XXX.*	UNITS mm	MAT'L SEE NOTE	FINISH SEE NOTE	Q'TY	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
											TITLE: MINI USB 5P/F 180° B型 (直尖脚)				
3	HOUSING	LCP	1	UL94V-0							PART NO.: MUBF-05*N-4BP81				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL							DWG NO.: AII-P81				
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN							SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.											APPD:				