


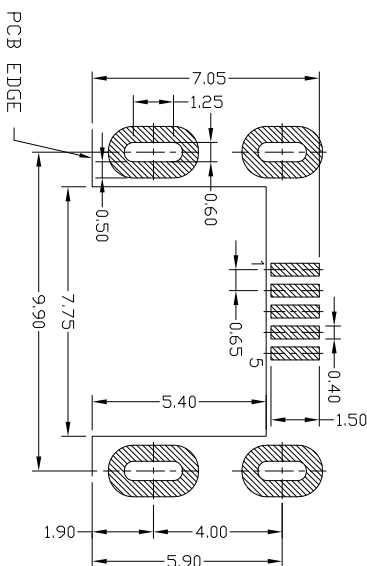




REV.	ECN.	NO.	APPD.

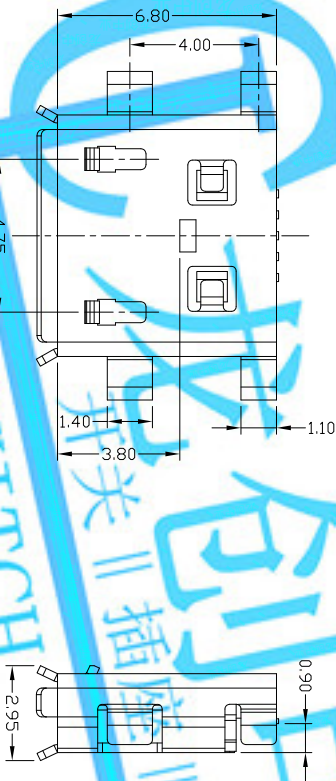

Halogen Free

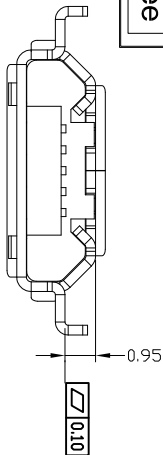

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.03

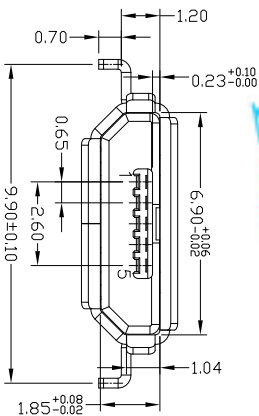

- NOTES:
- 1.ELECTRICAL:
- 1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX, 30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 5)OPERATING TEMPERATURE:-30°C TO +80°C.
- 2.Mechanical:
- 1)Mating Force: 35N MAX
- 2)Umating Force: 10N MIN.
- 3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05*1-4BHUA576

1Au 1U"
6Au 30U"

T1TIN
N1NICKEL

W1WHITE
B1BLACK

1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

3	SHELL	COPPER ALLOY	1	PLATED TIN	X: ±0.35	X': ±2"	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X' ±1"	MAT'L						
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX'	SEE NOTE						
					.XXX ±0.15	.XXX'	FINISH						
							SEE NOTE						
ND	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC					DR: Ricky 2018/5/4	DWG NO.:	ALL-HUA576	CUSTOMER DRAWING
							Q'TY		CHKD: Ricky 2018/5/4	SCALE	SHEET	REV.	
									APPD:	5:1	1/1	A	