

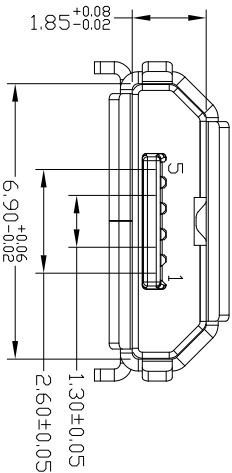
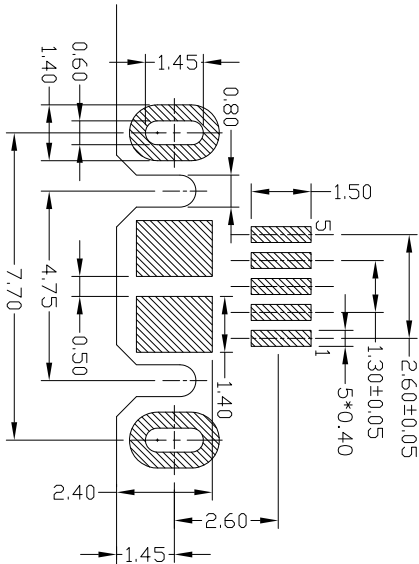

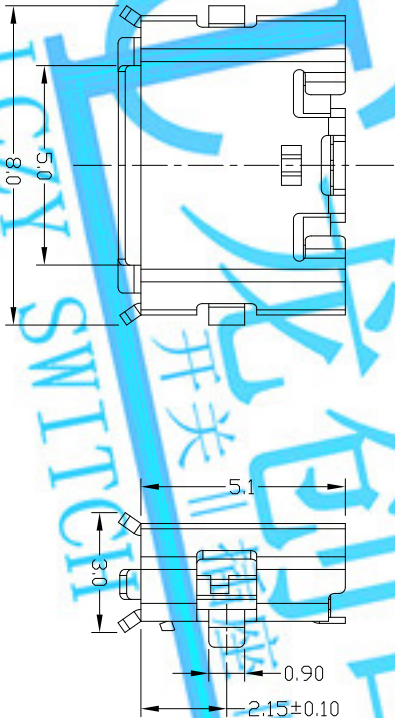


REV.	ECN.	NO.	APPD.

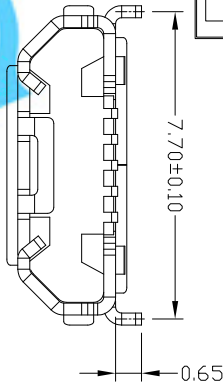

- NOTES:
- 1.ELECTRICAL:
- 1)VOLTAGE CURRENT RATING: PIN1&5 1.8AMP
MAX / PIN2&3&4 1AMP MAX, 30V AC;
2)INSULATION RESISTANCE: 100MΩ MIN;
3)CONTACT RESISTANCE: 30mΩ MAX;
4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
5)OPERATING TEMPERATURE: -30°C TD +80°C.
- 2.Mechanical:
- 1)Mating Force: 35N MAX
2)Umating Force: 10N MIN.
3.DIMENSIONS MARKED "▼" TD BE
CHECKED BY Q.C & IPQC.



Bill of materials:

E	3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
						TITLE:	PART NO.:	DWG NO.:	CUSTOMER DRAWING
E	2	HOUSING	LCP+30%GF	1	UL94V-0	DR: 两脚插7.7 脚长0.65短针	MUYF-05* N -4BHUA653	AI1-HUA653	
	1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	DR: 两脚插7.7 脚长0.65短针	MUYF-05* N -4BHUA653	AI1-HUA653	
	ND	PARTS	MATERIAL	QTY	FINISHING	CHKD: 2018/3/28	APPD: 2018/3/28	SCALE 1:1	REV. A