
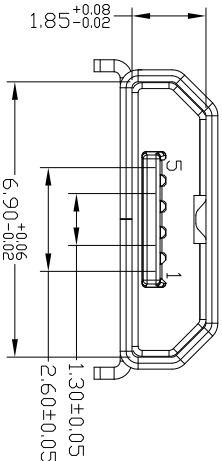


| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
|      |      |     |       |
|      |      |     |       |
|      |      |     |       |

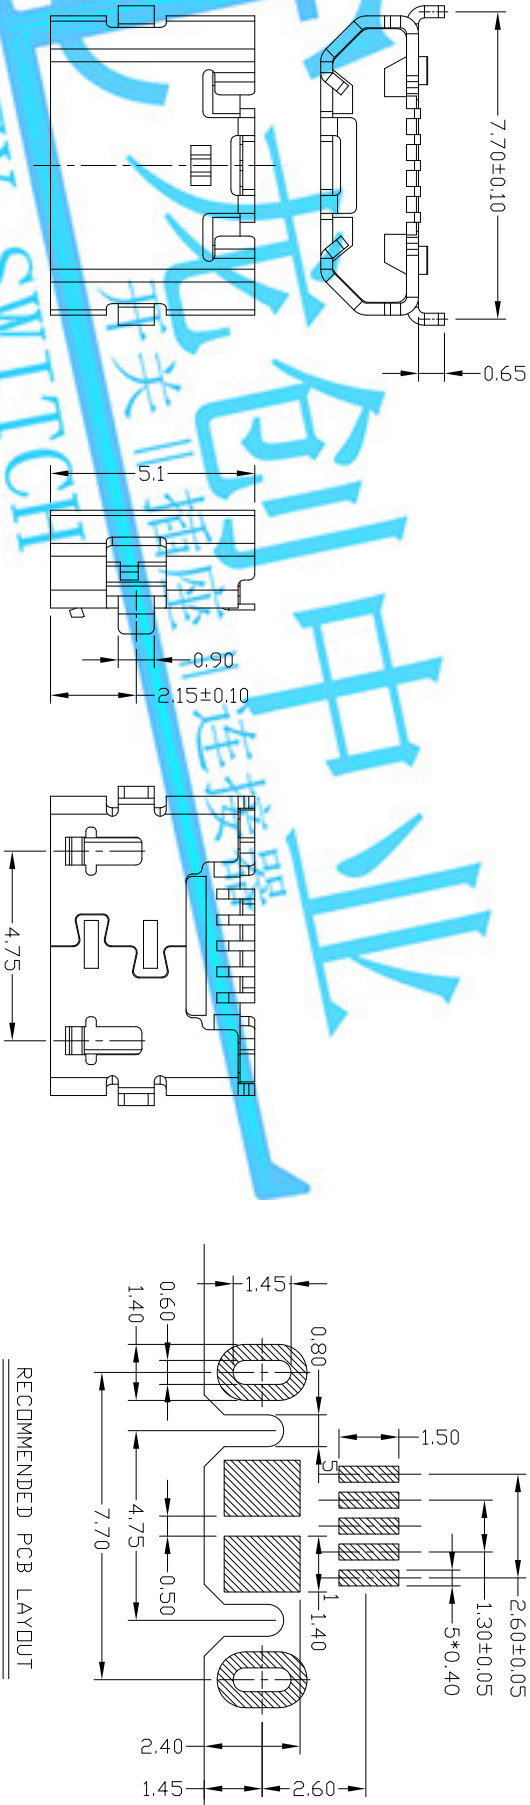


NOTES:

1.ELECTRICAL:

1)VOLTAGE CURRENT RATING: PIN1&5 1.8AMP  
MAX / PIN2&3&4 1AMP MAX, .30V AC;  
2)INSULATION RESISTANCE: 100MΩ MIN;  
3)CONTACT RESISTANCE: 30mΩ MAX;  
4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.  
5)OPERATING TEMPERATURE: -30°C TD +80°C.

2.Mechanical:

1)Mating Force: 35N MAX  
2)Umating Force: 10N MIN.  
3.DIMENSIONS MARKED "▼" TD BE  
CHECKED BY Q.C & IPQC.



Bill of materials:

| NO | PARTS    | MATERIAL        | QTY | FINISHING     | UNITS    | mm | TITLE:                             | PART NO.:          | SCALE | SHEET | REV. | CUSTOMER |
|----|----------|-----------------|-----|---------------|----------|----|------------------------------------|--------------------|-------|-------|------|----------|
| 3  | SHELL    | STAINLESS STEEL | 1   | PLATED NICKEL | MAT'L    | mm | LONGCHUANG ZHONGYE (HK)CO.,LIMITED | MUYF-05*N-4BHUA654 | 1:1   | 1/1   | A    | CUSTOMER |
| 2  | HOUSING  | LCP+30%GF       | 1   | UL94V-0       | SEE NOTE | mm | DR: 2018/3/28                      | DWG NO.:           | 1:1   | 1/1   | A    | CUSTOMER |
| 1  | TERMINAL | COPPER ALLOY    | 5   | PLATED GOLD   | SEE NOTE | mm | DR: 2018/3/28                      | DWG NO.:           | 1:1   | 1/1   | A    | CUSTOMER |
| ND | PARTS    | MATERIAL        | QTY | FINISHING     | Q'TY     | mm | DR: 2018/3/28                      | DWG NO.:           | 1:1   | 1/1   | A    | CUSTOMER |