





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

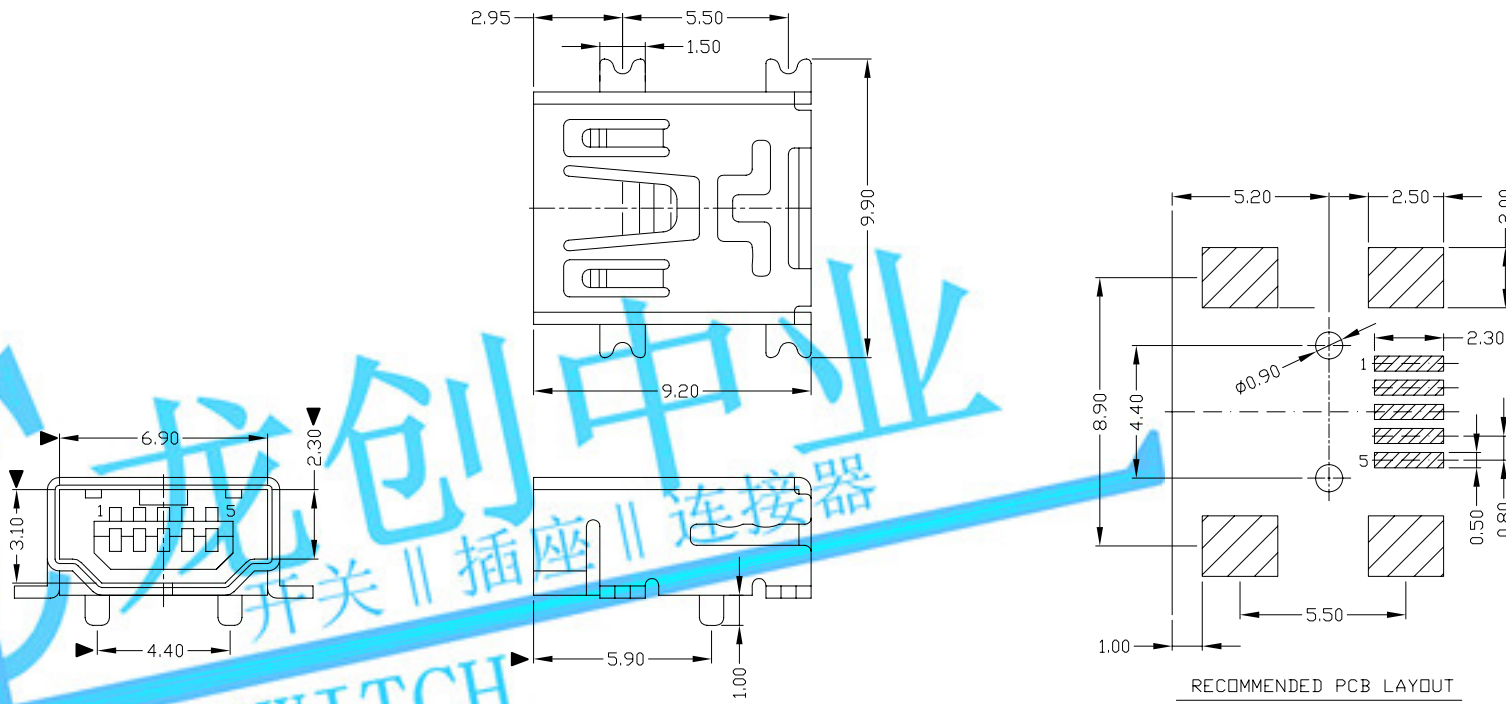

LCZY SWITCH

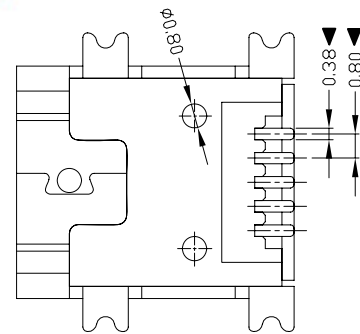

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100M Ω MIN;
 - CONTACT RESISTANCE: 50m Ω MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
MUAF-05*N-4BH80

1:Au 1U"
6:Au 30U"

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
3	HOUSING	LCP	1	UL94V-0	X. ± 0.35	X.* $\pm 2^*$	TITLE: MINI USB 5P/F SMT(A型1.0柱) PART NO.: MUAF-05*N-4BH80 DR: gan 2012/7/02 DWG NO.: AII-H80 CHKD: gan 2012/7/02 APPD:
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ± 0.3	.X* $\pm 1^*$	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XX ± 0.25	.XX*	
					.XXX ± 0.15	.XXX*	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.		SCALE: 1:1 SHEET: 1/1 REV.: B CUSTOMER DRAWING