





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

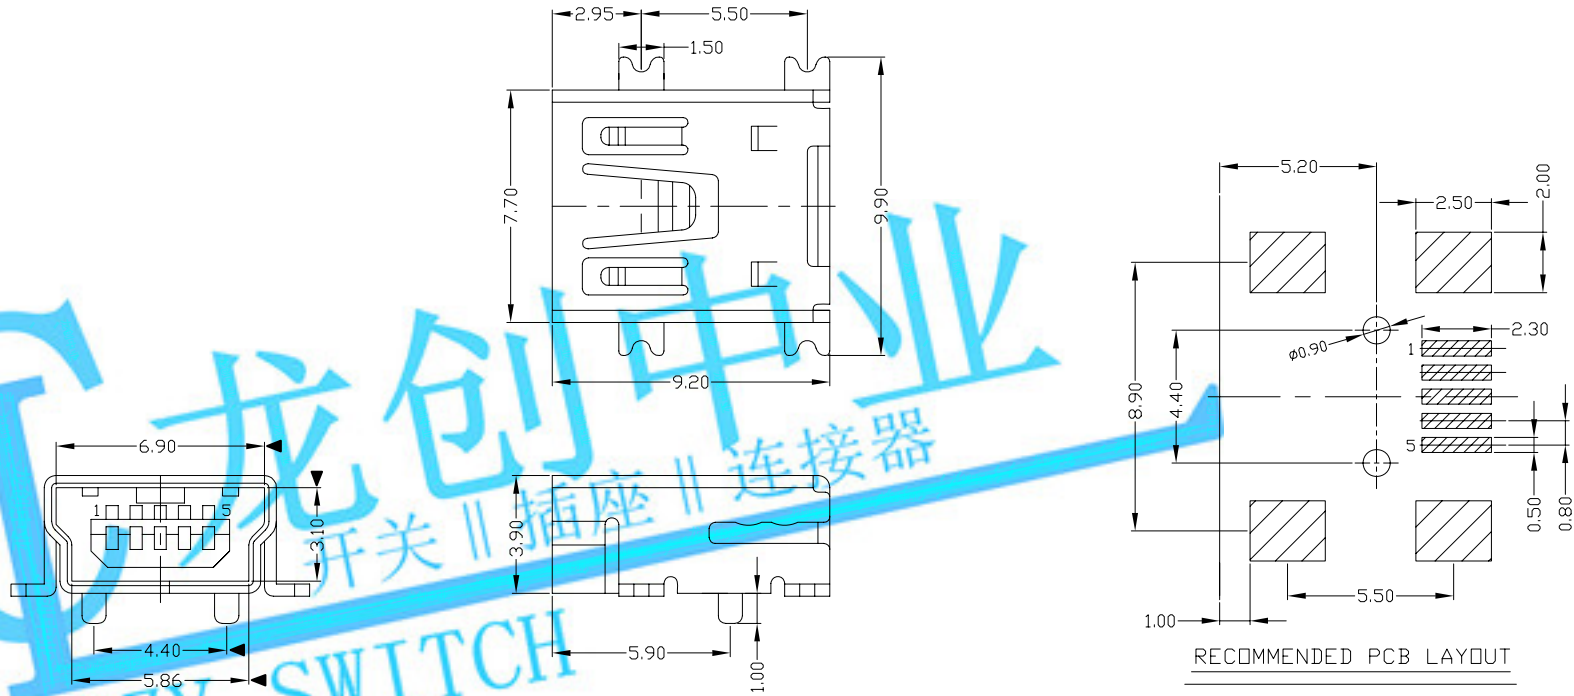

龙创中业
开关 插座 连接器
LCZY SWITCH

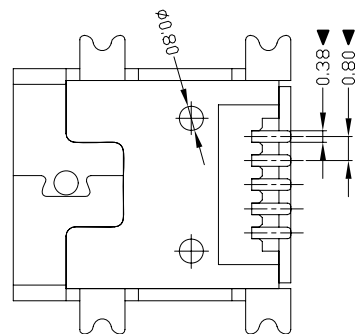

NOTES:

1. ELECTRICAL:

- VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
- INSULATION RESISTANCE: 100MΩ MIN;
- CONTACT RESISTANCE: 50mΩ MAX;
- WITHSTANDING VOLTAGE: 300V AC;
- OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBF-05*N-4BH80

1:Au 1U*
6:Au 30U*
N:NICKET
T:TIN

W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
					.X ±0.3	.X.* ±1°	MAT'L							
2	SHELL	COPPER ALLOY	1	PLATED NICKEL/TIN	.XX ±0.25	.XX*	SEE NOTE	TITLE:		PART NO.:				
					.XXX ±0.15	.XXX*		MINI USB 5P/F SMT(B型双卡点1.0柱)		MUBF-05*N-4BH80				
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		FINISH	DR:		DWG NO.:				
							SEE NOTE	gan 2012/7/02		AII-H80				
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	CHKD:		REV.				
							gan 2012/7/02		CUSTOMER					
								APPD:		SCALE		SHEET	B	DRAWING
										1:1		1/1	B	