
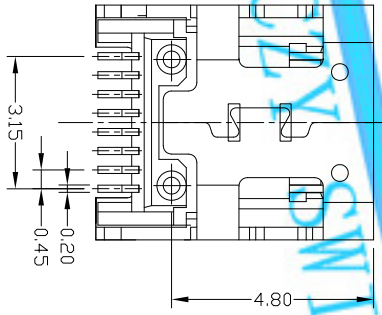
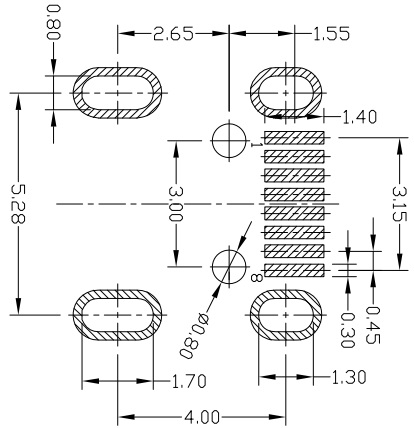
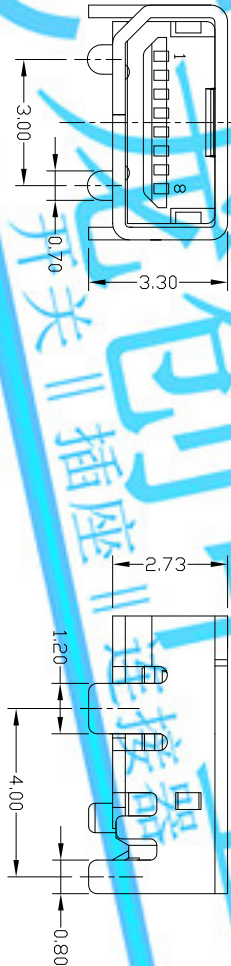


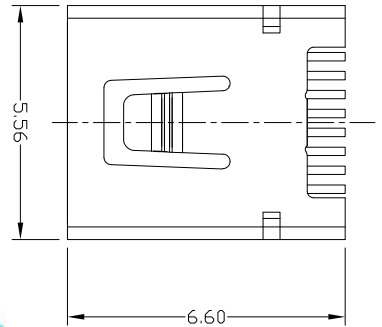

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 10AMP,30V DC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 50mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 300V AC;
 - 5) OPERATING TEMPERATURE:-55°C TD +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 1N MIN.
 - 3. DIMENSIONS MARKED "V" TD BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBF-08*N-4BV83
1Au 1U"
6Au 30U"
NiNICKEL
G:GOLD
1PBt
2PA6T
3PA9T
4LCP

W:WHITE
B:BLACK

LONGCHUANG ZHONGYE (HK)CO.,LIMITED										
TITLE:					PART NO:					
MINI USB 8P F 90° DIP四脚: 3mm(线 距单边倒角)					MUBF-08*1N-4B V83					
DR: <i>yan</i> 2017/05/03					DWG NO:					
CHKD: <i>yan</i> 2017/05/03					A11-V83					
APPD:					SCALE		SHEET		REV.	
					1:1		1/1		B	
									CUSTOMER DRAWING	
UNITS mm										
X .±0.35					X° ±2°					
X ±0.3					X° ±1°					
SEE NOTE					SEE NOTE					
FINISH					FINISH					
XXX ±0.15					XXX°					
SEE NOTE					SEE NOTE					
Q'TY					Q'TY					
										
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.										
ND	PARTS	MATERIAL	QTY	FINISHING						
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN						
2	SHELL	COPPER ALLOY	1	PLATED NICKEL/GOLD						
3	HOUSING	LCP+30%GF	1	UL 94V-0						