




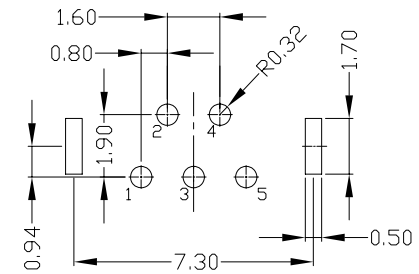


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

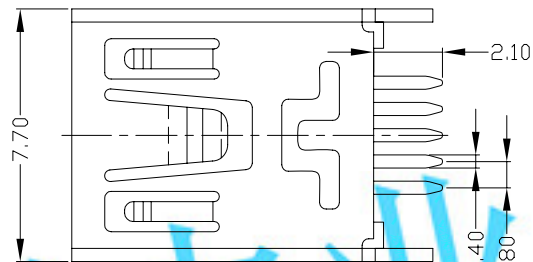

RECOMMENDED PCB LAYOUT

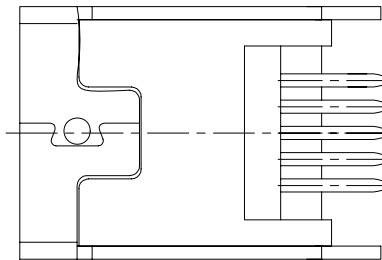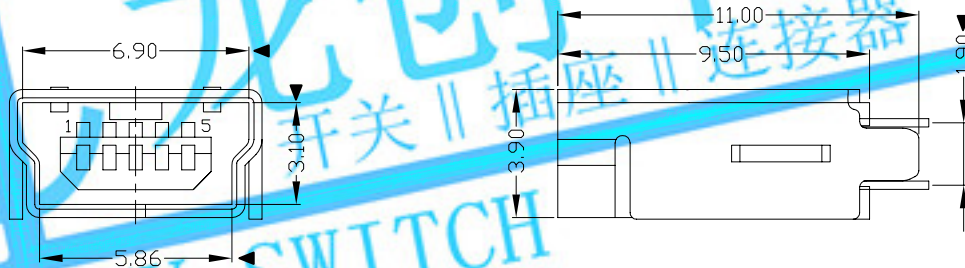

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 50mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 300V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 30N MAX
- 2) Unmating Force: 7N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBF-05*N-4BP82

1:1U"
6:1Au 30U"

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X.* ±1°	MAT'L	SEE NOTE	TITLE: MINI USB 5P/F 180° DIP B型(直脚)		PART NO.: MUBF-05*N-4BP82		
					.XX ±0.25	.XX*	FINISH						
					.XXX ±0.15	.XXX*	SEE NOTE		DR: gan 2012/7/02	DWG NO.: AII-P82			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	CHKD: gan 2012/7/02				SCALE
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:	1:1	1/1	B		