




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

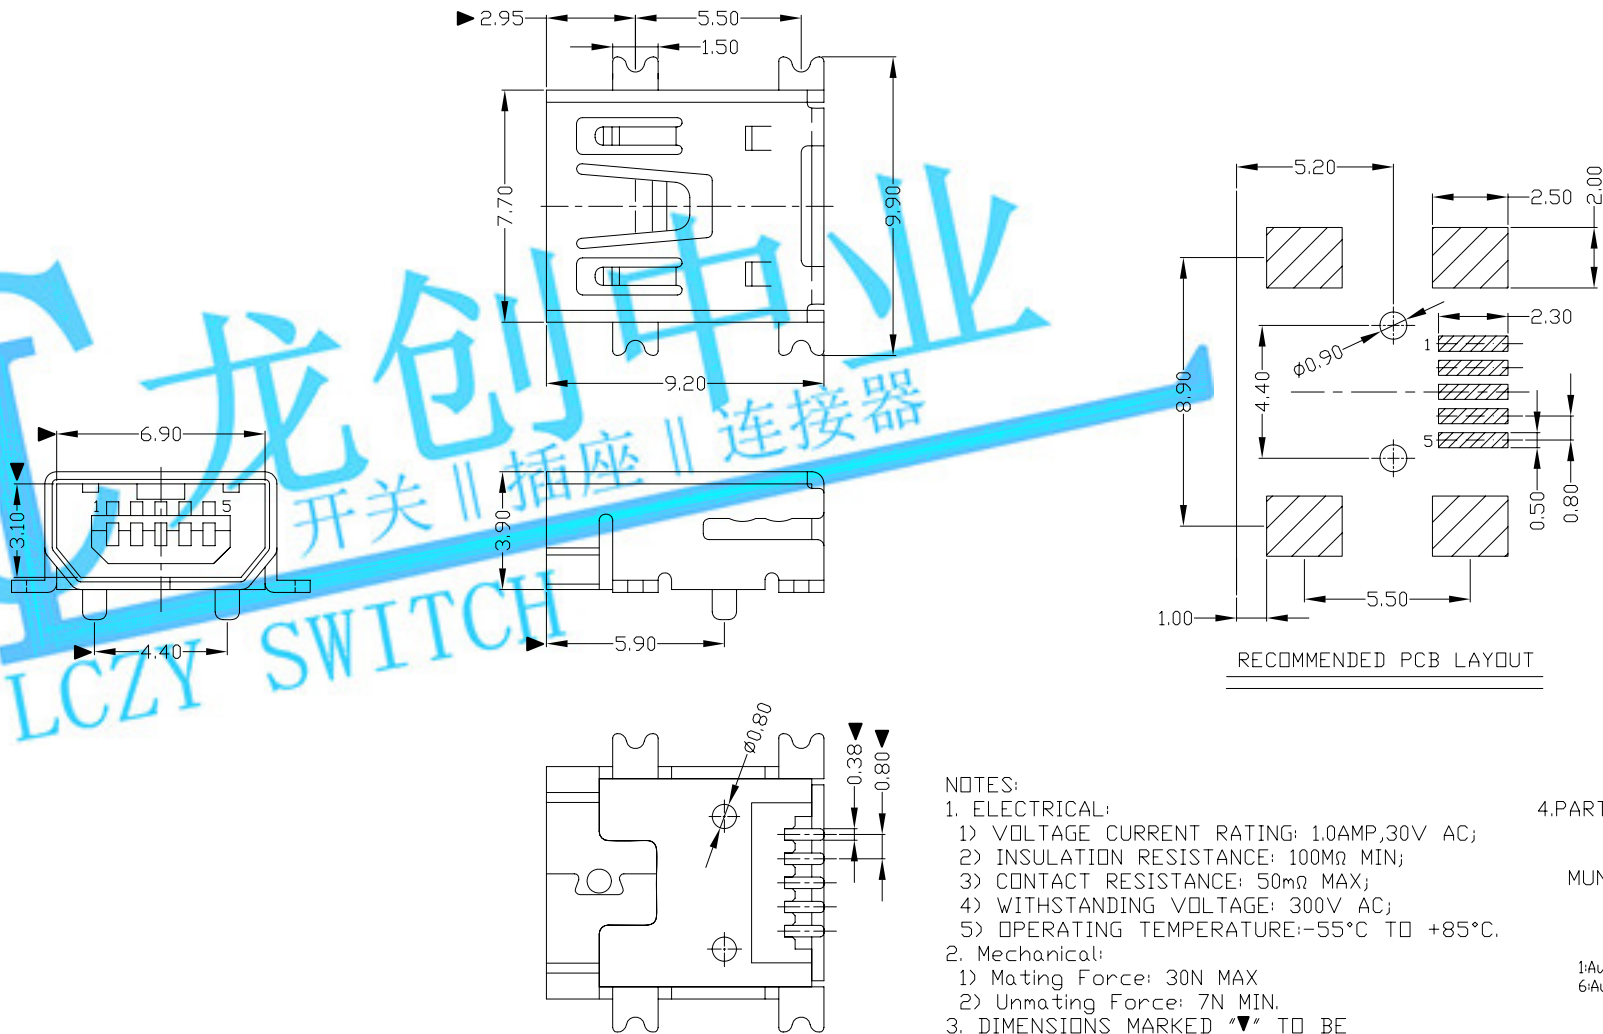

NOTES:

1. ELECTRICAL:

- VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
- INSULATION RESISTANCE: 100M Ω MIN;
- CONTACT RESISTANCE: 50m Ω MAX;
- WITHSTANDING VOLTAGE: 300V AC;
- OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- Mating Force: 30N MAX
- Unmating Force: 7N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUNF-05*N-4BH82

1:Au 1U*
6:Au 30U*

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

3	HOUSING	LCP	1	UL94V-0	X. ± 0.35	X.* $\pm 2^*$	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
					.X ± 0.3	.X.* $\pm 1^*$	MAT'L						
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ± 0.25	.XX*	SEE NOTE	TITLE: MINI USB 5P/F SMT (AB型双卡点1.0柱)		PART NO.: MUNF-05*N-4BH82			
					.XXX ± 0.15	.XXX*	FINISH						
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	DR: <i>gan</i> 2012/7/02		DWG NO.: AII-H82			
							Q'TY						CHKD: <i>gan</i> 2012/7/02
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:	SCALE		SHEET	REV.	CUSTOMER DRAWING