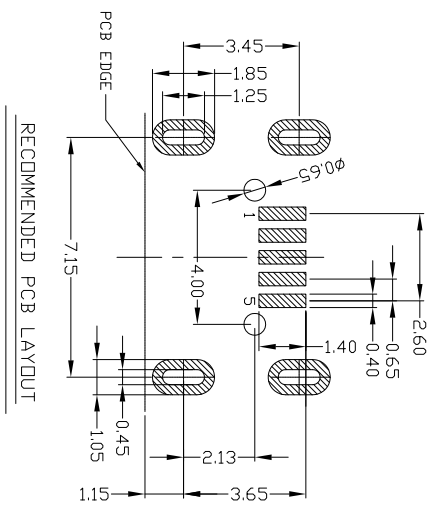
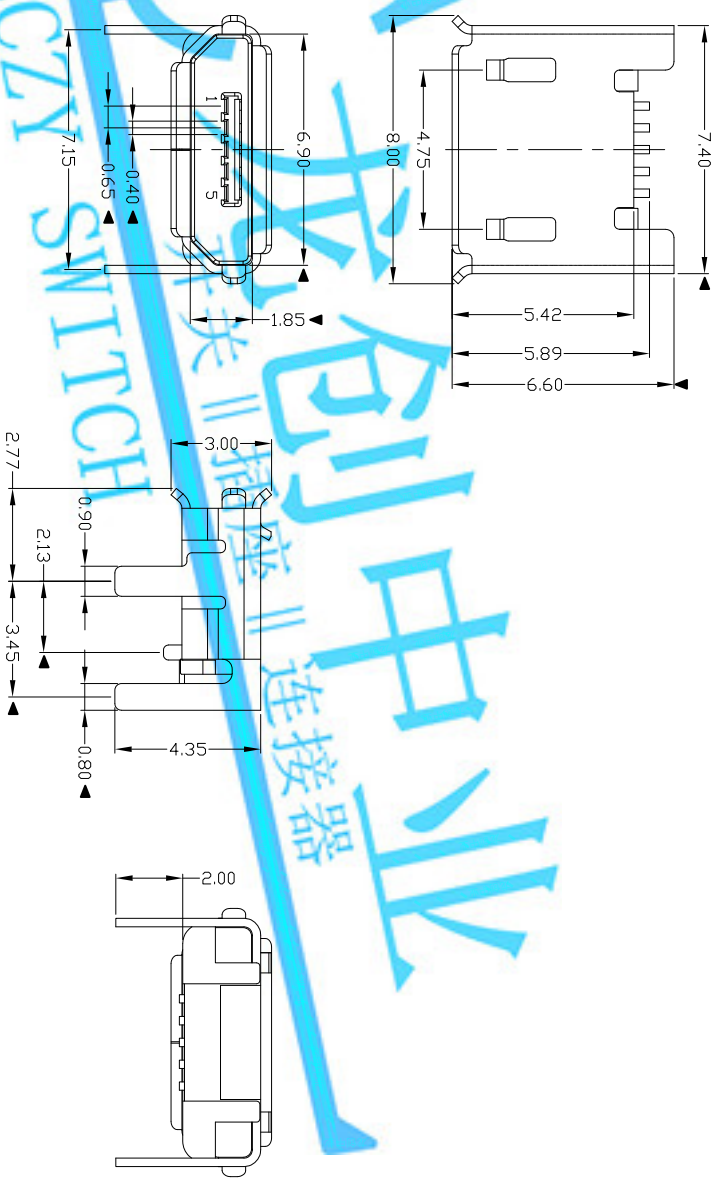


NOTES:

1. ELECTRICAL:

1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;

2) INSULATION RESISTANCE: 100MΩ MIN;

3) CONTACT RESISTANCE: 50mΩ MAX;

4) WITHSTANDING VOLTAGE: 300V AC;


5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

1) Mating Force: 30N MAX

2) Unmating Force: 7N MIN.

3. DIMENSIONS MARKED "▲" TO BE CHECKED BY QC & IPQC.



Bill of materials:

|    |          |              |     |                   |            |         |          |    |                                                                                                                                                                                                                                                                                                                                                                       |
|----|----------|--------------|-----|-------------------|------------|---------|----------|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3  | HOUSING  | LCP+30%GF    | 1   | UL 94V-0          | X: ±0.35   | X: ±2°  | UNITS    | mm | <div>LONGCHUANG ZHONGYE (HK)CO.,LIMITED</div> <div>TITLE:<br/>MICRO USB B TYPE 8P/F DIP<br/>(有柱/四脚2.0)</div> <div>PART NO.:<br/>MU YF-05*-4BH806</div> <div>DR:<br/>gan 2013/9/30</div> <div>CHKD:<br/>gan 2013/9/30</div> <div>APPD:</div> <div>DWG NO.:<br/>A11-H806</div> <div>SCALE</div> <div>SHEET</div> <div>REV.</div> <div>CUSTOMER</div> <div>DRAWING</div> |
| 2  | SHELL    | COPPER ALLOY | 1   | PLATED TIN/NICKEL | .X ±0.3    | .X' ±1° | MAT'L    |    |                                                                                                                                                                                                                                                                                                                                                                       |
| 1  | TERMINAL | COPPER ALLOY | 5   | PLATED GOLD       | .XX ±0.25  | .XX°    | SEE NOTE |    |                                                                                                                                                                                                                                                                                                                                                                       |
| ND | PARTS    | MATERIAL     | QTY | FINISHING         | .XXX ±0.15 | .XXX°   | FINISH   |    |                                                                                                                                                                                                                                                                                                                                                                       |