

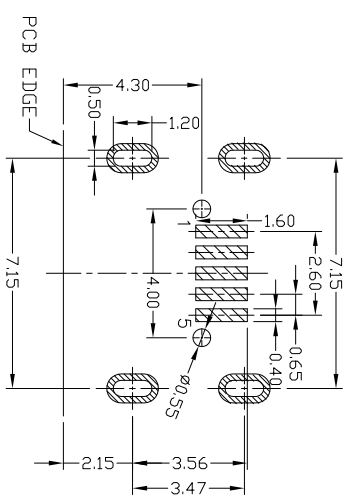





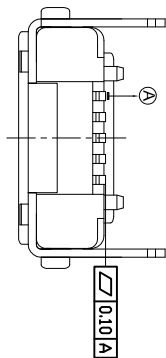


RECOMMENDED PCB LAYOUT

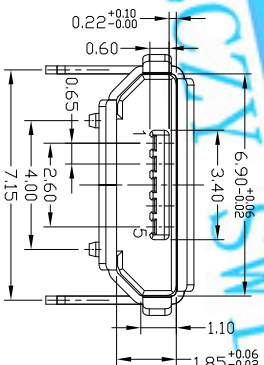

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN 8 & 5 1.8AMP MAX / PIN 2 & 3 & 4 1AMP MAX, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER
3	SHELL	COPPER ALLOY	1	PLATED NICKEL								
2	HOUSING	LCP+30%GF	1	UL94V-0								
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD								
NO	PARTS	MATERIAL	QTY	FINISHING								

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE: MICRO USB B TYPE F 5P 插板 7.2 有柱
前脚1.6后脚1.95 四脚插 加长0.2

DR: 2018/9/14
CHKD: 2018/9/14
APPD: 2018/9/14

SCALE: 5:1
SHEET: 1/1
REV: A
CUSTOMER: DRAWING