

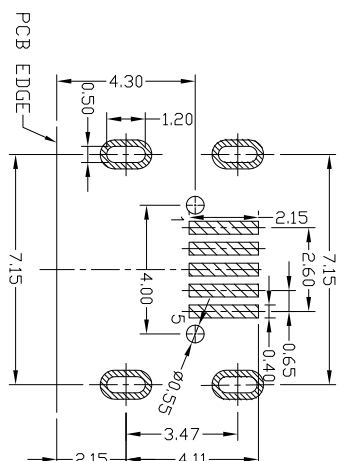
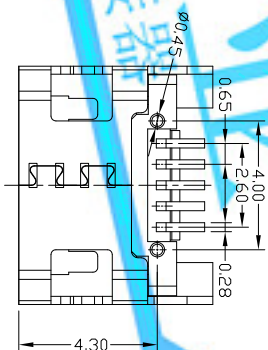




Halogen Free



RECOMMENDED PCB LAYOUT

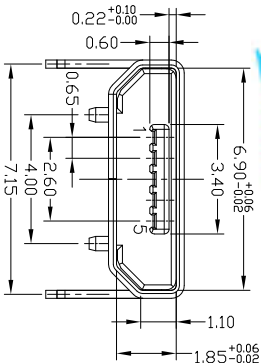

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05*N-4BHUA571
1AU 1U" W/WHITE
6AU 30U" B-BLACK
T-TIN
N-NICKEL
1-PBT
2-PA6T
3-PA9T
4-LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	SCALE	SHEET	REV.	CUSTOMER
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	MAT'L	SEE NOTE	5:1	1/1	A	DRAWING
2	HOUSING	LCP+30%GF	1	UL94V-0	FINISH	SEE NOTE	5:1	1/1	A	DRAWING
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	Q'TY	SEE NOTE	5:1	1/1	A	DRAWING
ND	PARTS	MATERIAL	QTY	FINISHING	APPD:	CHKD:	SCALE	SHEET	REV.	CUSTOMER

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE: MICRO USB B TYPE F 5P 插板; 2 有柱
前脚1.6后脚1.95 四脚插板 加长0.75无边
DR: 2018/9/14
PART NO.: MUYF-05XN-4BHUA571

DR: 2018/9/14
DWG NO.: ALL-HUA571

APPD: 2018/9/14
SCALE: 5:1
SHEET: 1/1
REV: A
CUSTOMER: DRAWING