

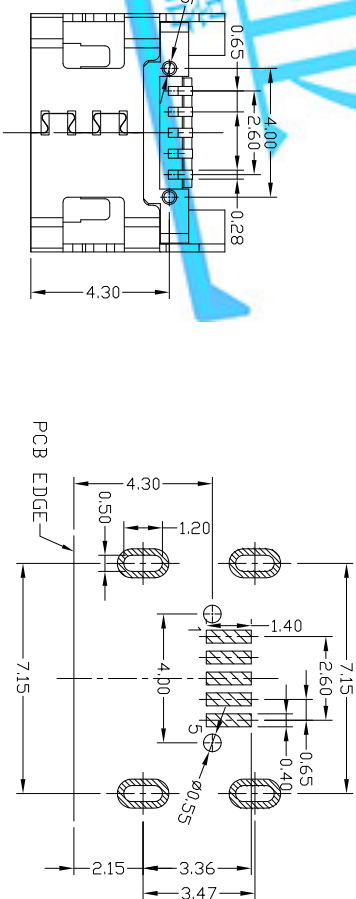
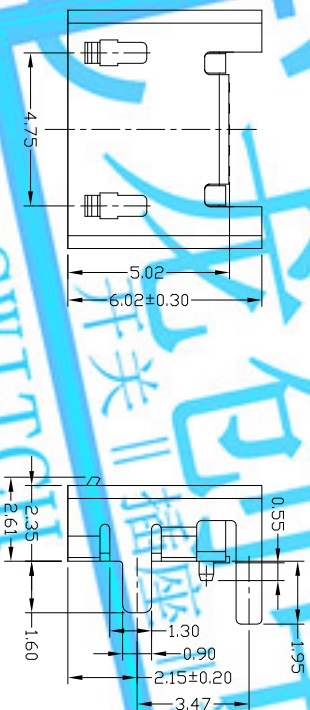





RECOMMENDED PCB LAYOUT

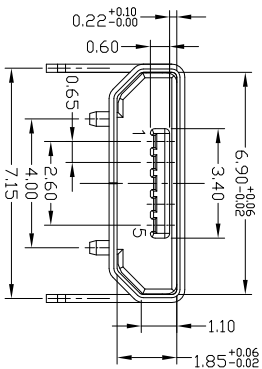

NOTES:

1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: PIN 1 & 5 18AMP MAX / PIN 2 & 3 4 1AMP MAX, 30V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC, FOR 1 MIN
 - 5) OPERATING TEMPERATURE: -30°C TO +80°C.
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY QC & IPQC.



4.PART NO.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		PART NO.:							
MICRO USB B TYPE F 5P 插板7.2 有柱 前脚1.6后脚1.95 四脚插 短针无等位		MUZF-05XN-4BHUA647							
DR: <i>Rocky</i> 2018/9/14		DWG NO.: AII-HUA647							
CHKD: <i>Rocky</i> 2018/9/14		SCALE SHEET REV. CUSTOMER DRAWING							
APPD:		5:1 1/1 A							
Q'TY		Q'TY							
									
UNITS mm		MATERIAL							
SEE NOTE		SEE NOTE							
FINISH		XXX ±0.15 XXX*							
SEE NOTE		XXX ±0.15 XXX*							
XXX ±0.25		XX*							
XXX ±0.30		X* ±1*							
X ±0.35		X* ±2*							
1		PLATED NICKEL							
3		SHELL COPPER ALLOY							
2		HOUSING LCP+30%GF							
1		TERMINAL COPPER ALLOY							
5		PLATED GOLD							
QTY		FINISHING MATERIAL							
ND PARTS									