


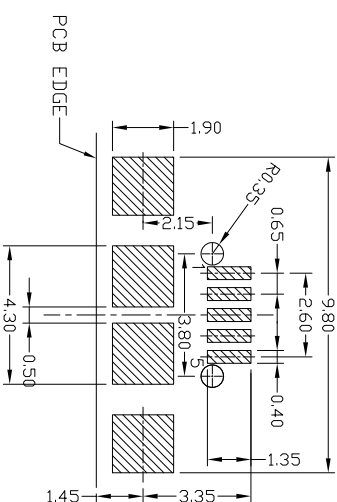

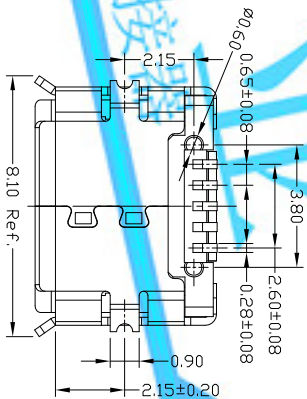
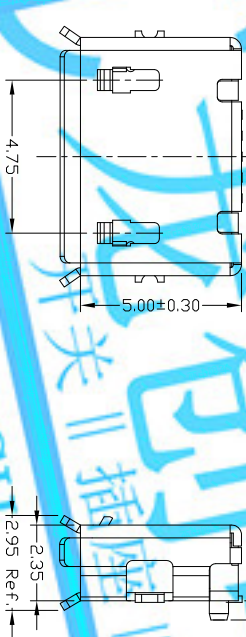


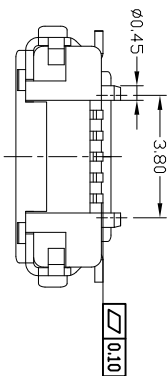

RECOMMENDED PCB LAYOUT

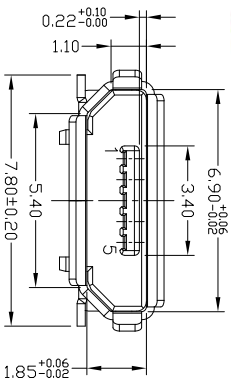

- NOTES:
1. ELECTRICAL:
1) VOLTAGE CURRENT RATING: PIN 1 & 5 1.8AMP MAX / PIN 2 & 3 & 4 1AMP MAX, 30V AC;
2) INSULATION RESISTANCE: 100MΩ MIN;
3) CONTACT RESISTANCE: 30mΩ MAX;
4) WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
5) OPERATING TEMPERATURE: -30°C TO +80°C.
2. Mechanical:
1) Mating Force: 35N MAX
2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.



Bill of materials:

3	SHELL	COPPER ALLOY	1	PLATED TIN	X: ±0.35	X': ±2"	UNITS	mm	LONGCHUANG ZHONGYE (HK) CO., LIMITED			
2	HOUSING	LCP+30%GF	1	UL94V-0	X: ±0.30	X': ±1"	MAT'L		TITLE: MICRO USB B TYPE F 5P SMT 有脚柱3.8版			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX'	SEE NOTE		DR: 2018/9/6			
ND	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'	SEE NOTE	Q'TY	DWG NO.: ALL-HUA015			
									CHKD: 2018/9/6			
									APPD: 5:1			
									SCALE SHEET 1/1			
									REV. A			
									CUSTOMER DRAWING			