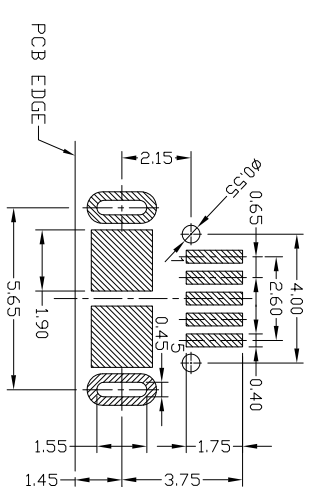
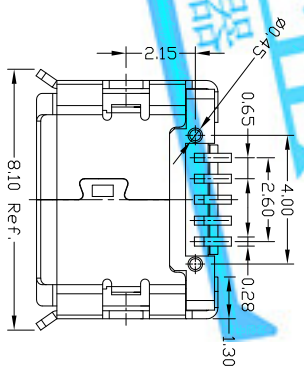
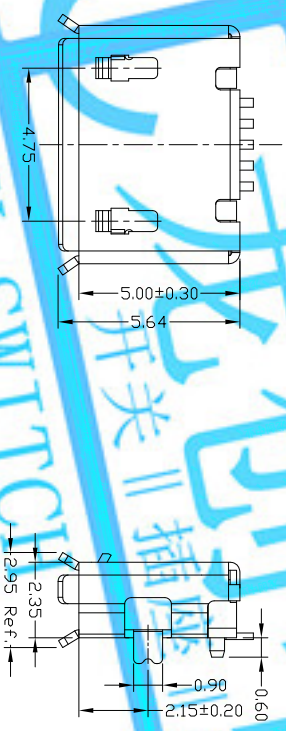



- NOTES:
1. ELECTRICAL:

1) VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX, 30V AC;

2) INSULATION RESISTANCE: 100MΩ MIN;

3) CONTACT RESISTANCE: 30mΩ MAX;

4) WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.


5) OPERATING TEMPERATURE:-30°C TO +80°C.

2. Mechanical:

1) Mating Force: 35N MAX

2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.



RECOMMENDED PCB LAYOUT

Bill of materials:			LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
3	SHELL	COPPER ALLOY	1	PLATED TIN		
2	HOUSING	LCP+30%GF	1	UL94V-0		
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD		
ND	PARTS	MATERIAL	QTY	FINISHING		

X: ±0.35	X': ±2"	UNITS	mm	TITLE: MICRO USB B TYPE F 5P 插板.9 脚位0.8有脚柱脚加位0.4		
.X ±0.30	.X' ±1"	MAT'L				
.XX ±0.25	.XX'	SEE NOTE				
.XXX ±0.15	.XXX'	FINISH				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.				Q'TY	SEE NOTE	
				DR: Ricky	2018/9/7	
				CHKD: Ricky	2018/9/7	
				APPD:		
				PART NO.:	MUF-05XT-4BHUA035	
				DWG NO.:	ALL-HUA035	
				SCALE	SHEET	REV.
				5:1	1/1	A
				CUSTOMER DRAWING		

REV.	ECN.	NO.	APPD.